




CS3-1

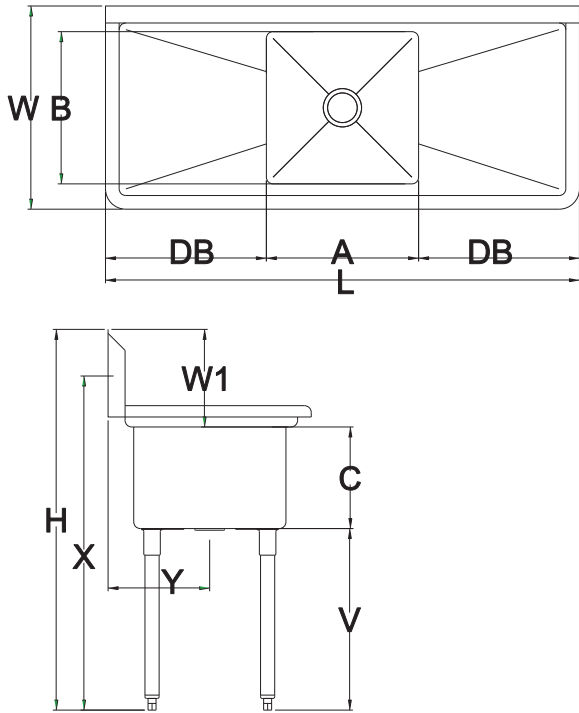

STANDARD FEATURES

- 300 Series Stainless steel top
 - 1-2/3” galvanized steel legs with adjustable feet
 - Optional upgrade to stainless steel legs available
 - 12” deep bowls 3/4” coved corners
 - 9” backsplash
- 2-1/2” edge rim
 - 3-1/2” drain
 - Drainboards are dipped and the bowls are seamlessly welded together.
 - 6 pcs /1 pallet.
 - Pallet covered with protecting film, bubble paper and paper corners.

Optional Upgrade: Model SS (STAINLESS STEEL LEGS) For Example: CS3-1-2016RLSS-18

MODEL	DRAINBOARD	O.A.Dims - in.				Bowl Dims - in			Installation Dims - in.				CBM
		L	W	H	DB	A	B	C	V	W1	X	Y	
CS3-1-2016	NO	22	26	45	0	16	20	12	21-1/2	11-1/2	39-1/2	13	0.146
CS3-1-2016L-18	Left	37	26	45	18	16	20	12	21-1/2	11-1/2	39-1/2	13	0.242
CS3-1-2016R-18	Right	37	26	45	18	16	20	12	21-1/2	11-1/2	39-1/2	13	0.242
CS3-1-2016RL-18	Double	52	26	45	18	16	20	12	21-1/2	11-1/2	39-1/2	13	0.338
CS3-1-1818	NO	24	24	45	0	18	18	12	21-1/2	11-1/2	39-1/2	12	0.147
CS3-1-1818L-18	Left	39	24	45	18	18	18	12	21-1/2	11-1/2	39-1/2	12	0.235
CS3-1-1818R-18	Right	39	24	45	18	18	18	12	21-1/2	11-1/2	39-1/2	12	0.235
CS3-1-1818RL-18	Double	54	24	45	18	18	18	12	21-1/2	11-1/2	39-1/2	12	0.324
CS3-1-2418	NO	24	30	45	0	18	24	12	21-1/2	11-1/2	39-1/2	15	0.182
CS3-1-2418L-18	Left	39	30	45	18	18	24	12	21-1/2	11-1/2	39-1/2	15	0.292
CS3-1-2418R-18	Right	39	30	45	18	18	24	12	21-1/2	11-1/2	39-1/2	15	0.292
CS3-1-2418RL-18	Double	54	30	45	18	18	24	12	21-1/2	11-1/2	39-1/2	15	0.337
CS3-1-2418L-24	Left	45	30	45	24	18	24	12	21-1/2	11-1/2	39-1/2	15	0.337
CS3-1-2418R-24	Right	45	30	45	24	18	24	12	21-1/2	11-1/2	39-1/2	15	0.337
CS3-1-2418RL-24	Double	66	30	45	24	18	24	12	21-1/2	11-1/2	39-1/2	15	0.491
CS3-1-2020	NO	26	26	45	0	20	20	12	21-1/2	11-1/2	39-1/2	13	0.171
CS3-1-2020L-20	Left	43	26	45	20	20	20	12	21-1/2	11-1/2	39-1/2	13	0.280
CS3-1-2020R-20	Right	43	26	45	20	20	20	12	21-1/2	11-1/2	39-1/2	13	0.280
CS3-1-2020RL-20	Double	60	26	45	20	20	20	12	21-1/2	11-1/2	39-1/2	13	0.389
CS3-1-2424	NO	30	30	45	0	24	24	12	21-1/2	11-1/2	39-1/2	15	0.226
CS3-1-2424L-24	Left	51	30	45	24	24	24	12	21-1/2	11-1/2	39-1/2	15	0.381
CS3-1-2424R-24	Right	51	30	45	24	24	24	12	21-1/2	11-1/2	39-1/2	15	0.381
CS3-1-2424RL-24	Double	72	30	45	24	24	24	12	21-1/2	11-1/2	39-1/2	15	0.520

sales@heavydutysystems.com