




DD-X-A-.25hp-11-AL

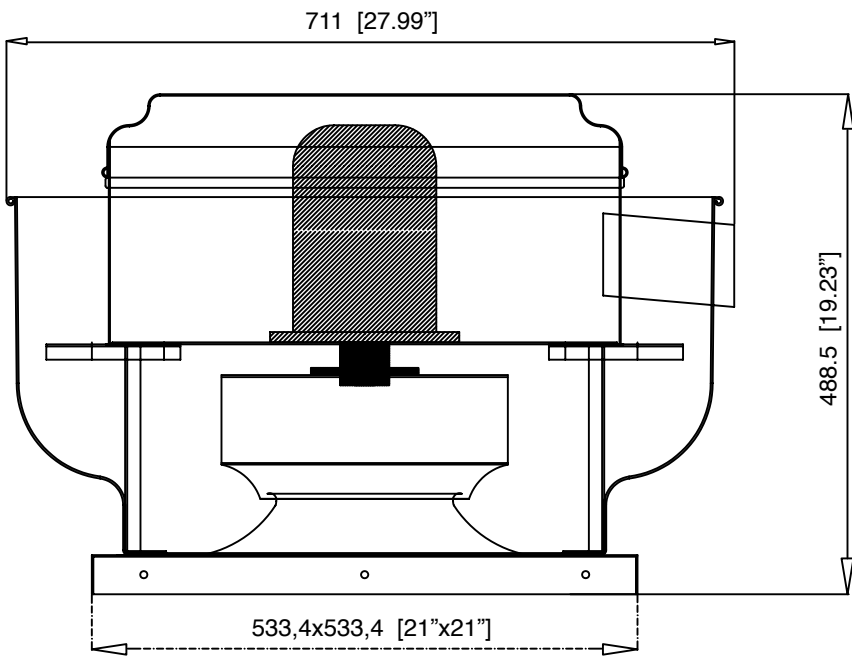


STANDARD FEATURES

- Exhaust fan specifically designed for roof or sidewall mounted applications where contaminated or grease laden exhaust air can be discharged directly upward, away from the roof or wall surface
- Heavy duty aluminum construction, durable and weather resistant
 - Coated with corrosion resistant epoxy resin
- Vibration Isolators support the drive frame and blower assembly for long life and minimal sound transmission into the building
- Direct Drive
- Base with prepunched mounting holes for easy attachment to roof curb
- Drain/Grease Trough - Allows for one-point drainage of water, grease and other residues
- Comes with Grease Collector and Hinge Kit



MODEL	POWER	AC MOTOR 1Ø	FAN SPEED	IMPELLER DIA
DD-X-A-.25hp-11-AL	0.25HP	208V-230V/60Hz	1720RPM	11inch
	0.25HP	110V-120V/60Hz		

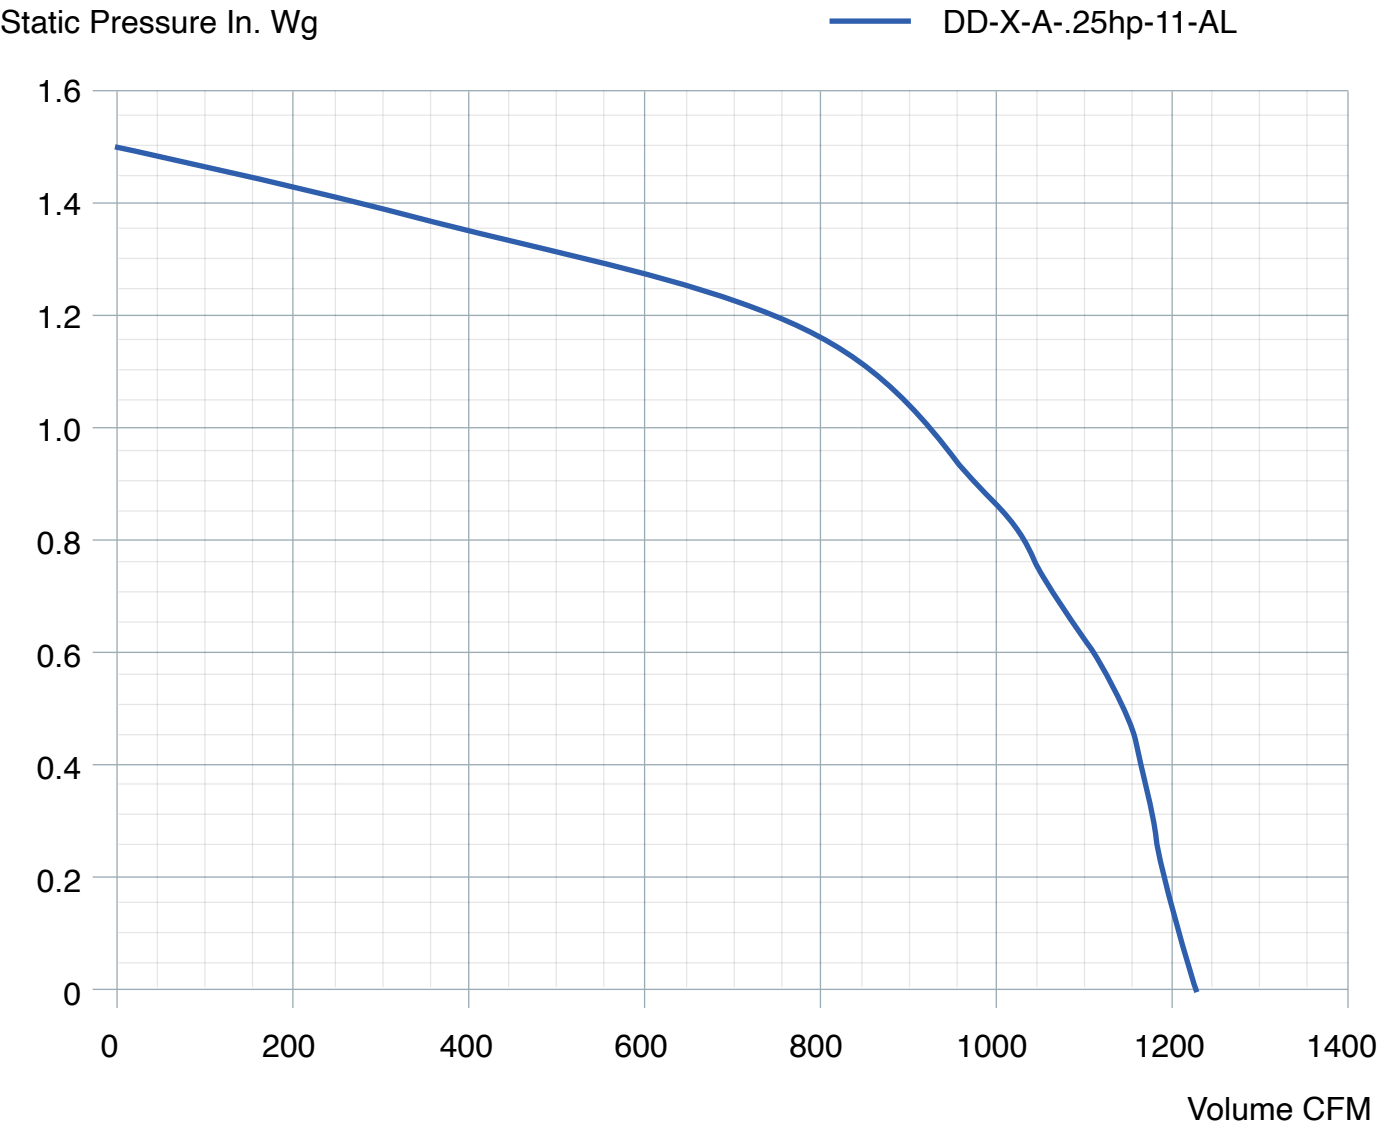

sales@heavydutysystems.com