





DD-X-B-2.2KW-25-AL / DD-X-B-1.1KW-25-AL
BD-X-B-1.5KW-25-AL / BD-X-B-3KW-25-AL

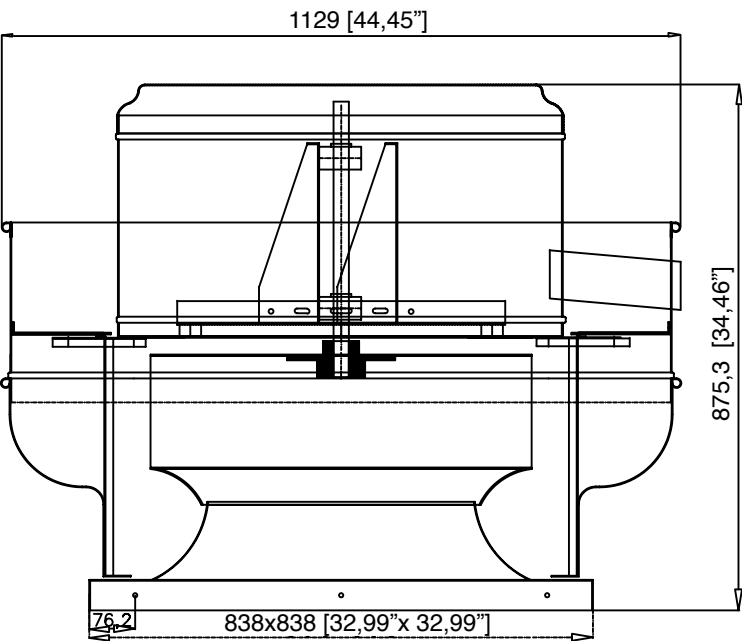

STANDARD FEATURES

- Exhaust fan specifically designed for roof or sidewall mounted applications where contaminated or grease laden exhaust air can be discharged directly upward, away from the roof or wall surface
- Heavy duty aluminum construction, durable and weather resistant
 - Coated with corrosion resistant epoxy resin
- Vibration Isolators support the drive frame and blower assembly for long life and minimal sound transmission into the building
- Direct Drive or Belt Drive
- Base with prepunched mounting holes for easy attachment to roof curb
- Drain/Grease Trough - Allows for one-point drainage of water, grease and other residues
- Comes with Grease Collector and Hinge Kit

MODEL	POWER	AC MOTOR 1Ø	AC MOTOR 3Ø	FAN SPEED	IMPELLER DIA
DD-X-B-2.2KW-25-AL	2.2KW	NONE	380V or 415/50Hz	960RPM Direct Drive	25inch
DD-X-B-1.1KW-25-AL	1.1KW	220V/-240V/50Hz	380V or 415/50Hz	720RPM Direct Drive	
BD-X-B-1.5KW-25-AL	1.5KW	220V/-240V/50Hz	380V or 415/50Hz	850RPM Belt Drive	
BD-X-B-3KW-25-AL	3KW	NONE	380V or 415/50Hz	1200RPM Belt Drive	

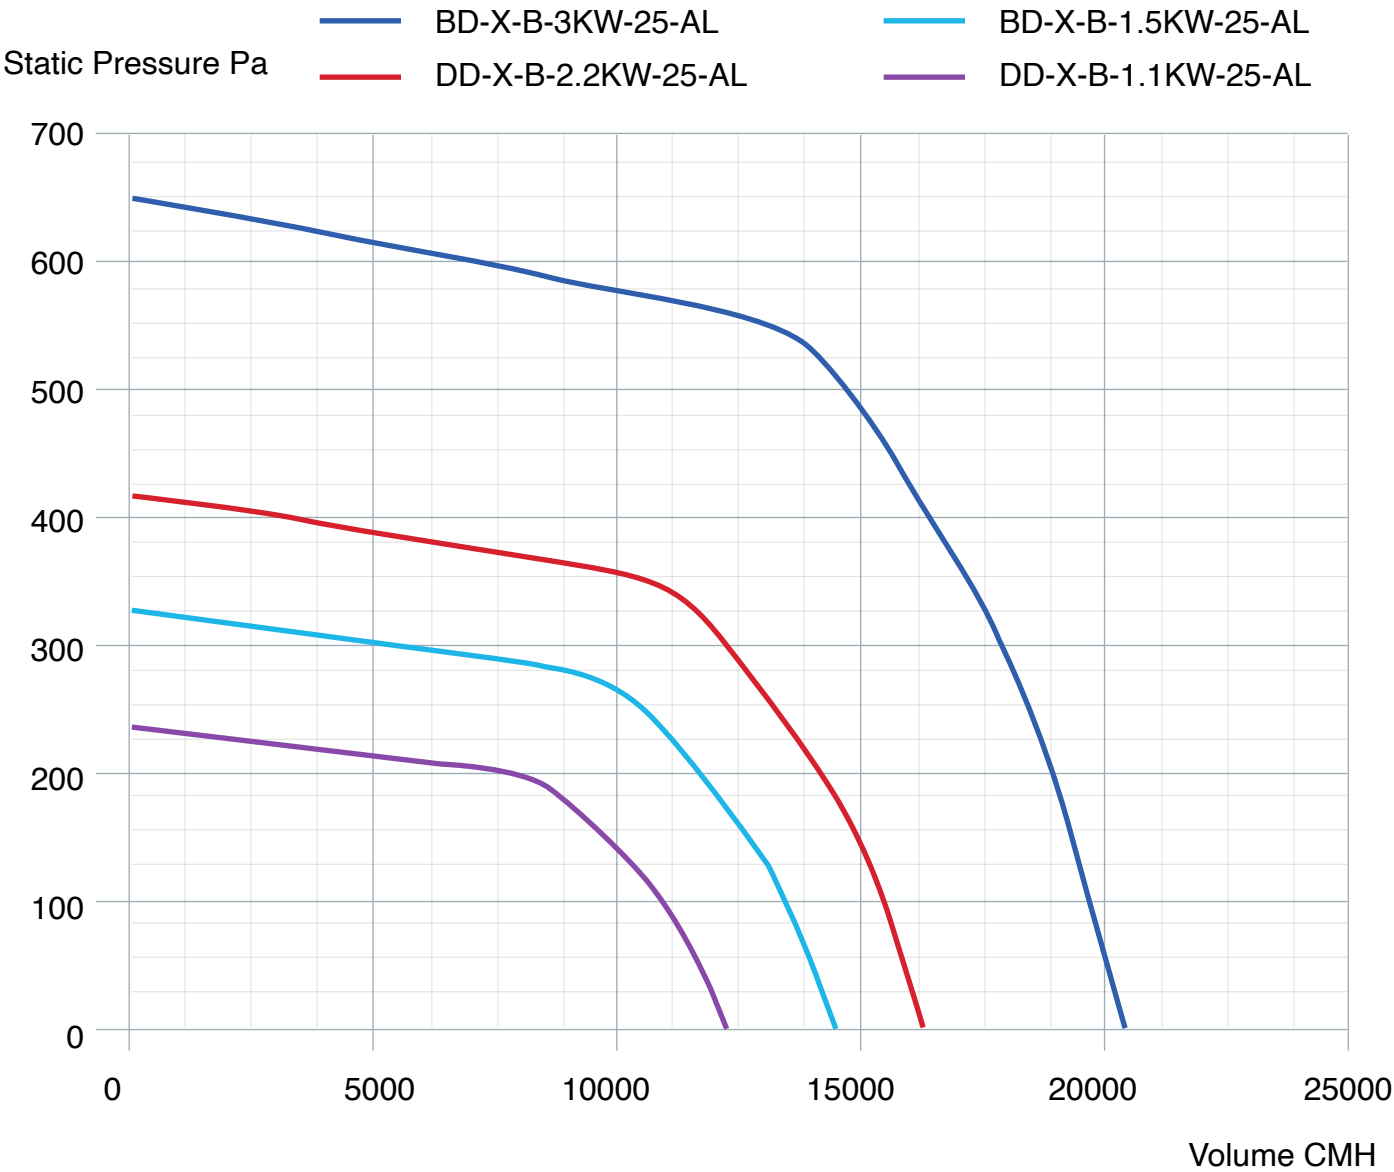

sales@heavydutysystems.com