




DD-X-B-4KW-28-AL / DD-X-B-2.2KW-28-AL

BD-X-B-5.5KW-28-AL

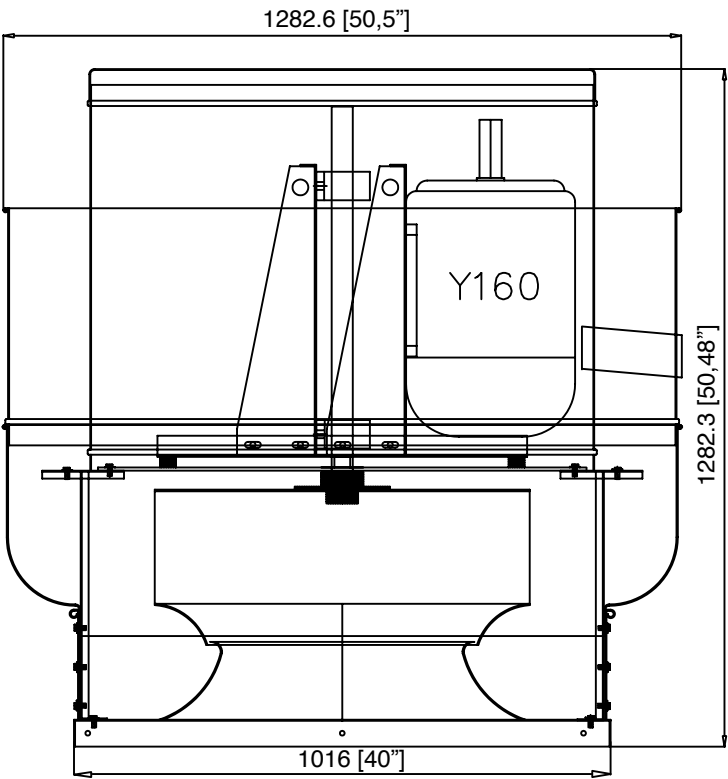


STANDARD FEATURES

- Exhaust fan specifically designed for roof or sidewall mounted applications where contaminated or grease laden exhaust air can be discharged directly upward, away from the roof or wall surface
- Heavy duty aluminum construction, durable and weather resistant
 - Coated with corrosion resistant epoxy resin
- Vibration Isolators support the drive frame and blower assembly for long life and minimal sound transmission into the building
- Direct Drive or Belt Drive
- Base with prepunched mounting holes for easy attachment to roof curb
- Drain/Grease Trough - Allows for one-point drainage of water, grease and other residues
- Comes with Grease Collector and Hinge Kit



MODEL	POWER	AC MOTOR 1Ø	AC MOTOR 3Ø	FAN SPEED	IMPELLER DIA
DD-X-B-4KW-28-AL	4KW	NONE	380V or 415/50Hz	960RPM Direct Drive	28inch
DD-X-B-2.2KW-28-AL	2.2KW	NONE	380V or 415/50Hz	720RPM Direct Drive	
BD-X-B-5.5KW-28-AL	5.5KW	NONE	380V or 415/50Hz	1150RPM Belt Drive	

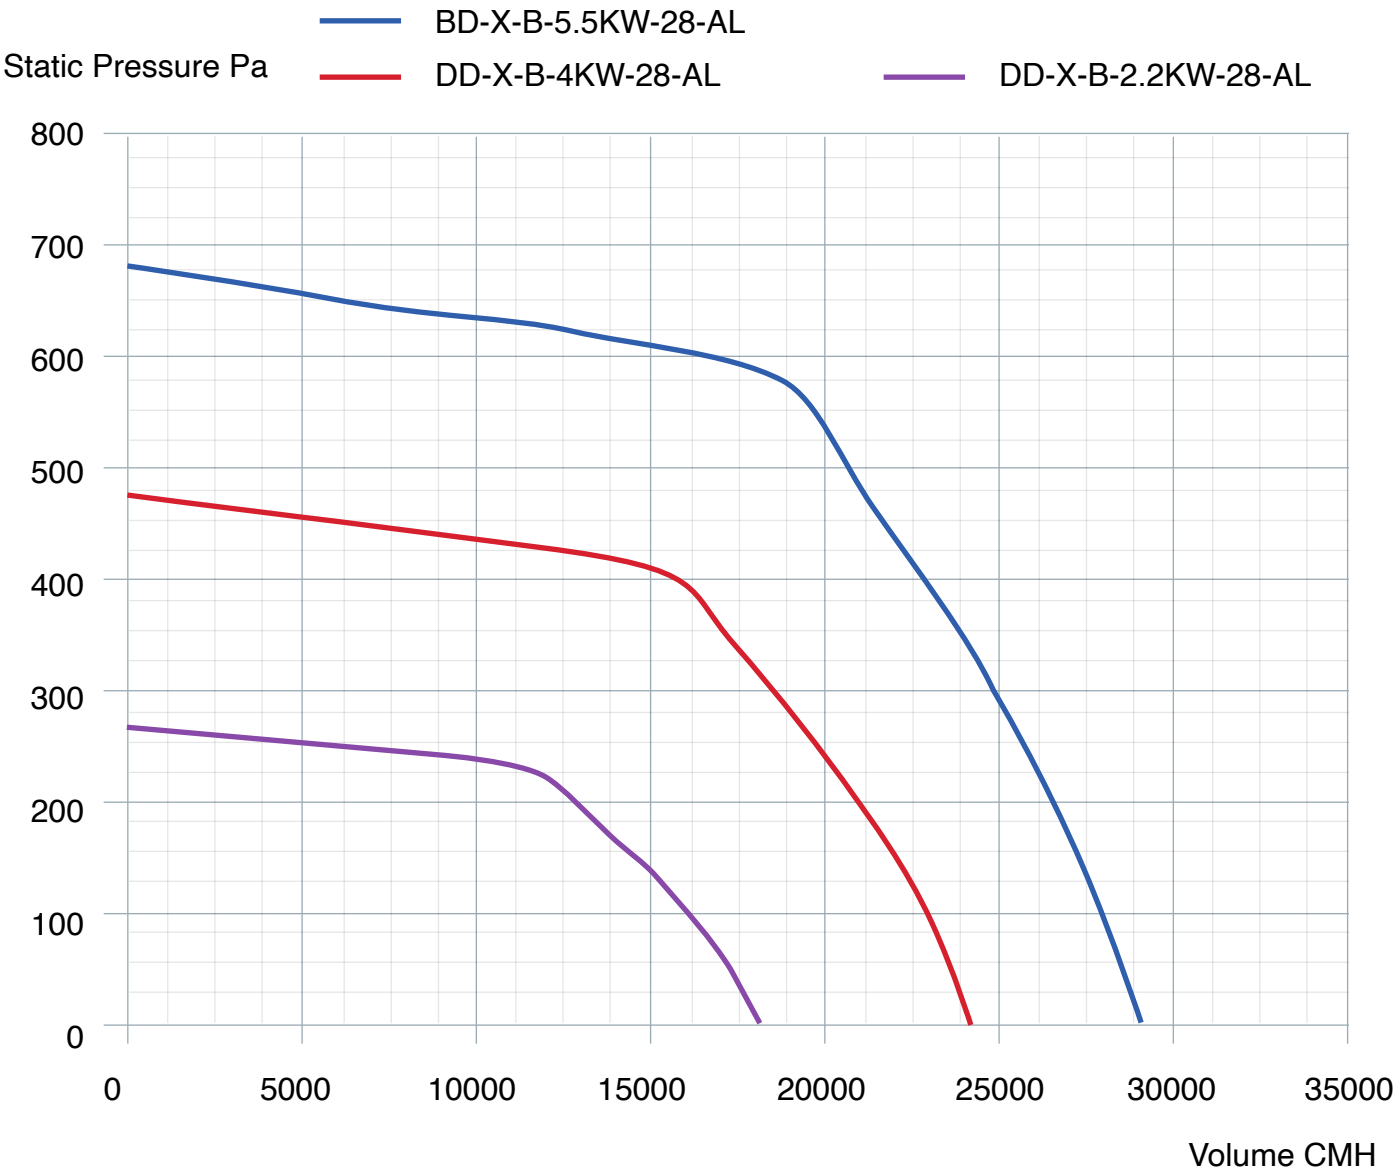

sales@heavydutysystems.com

