





STANDARD FEATURES


- Direct-drive sidewall propeller fan provides general exhaust or air supply in commercial and industrial applications
- Heavy duty galvanized steel construction coated with corrosion resistant epoxy resin
- Units feature corrosion resistant aluminum propellers
- Optional variable speed control available (in 110-120/60/1 setup only)

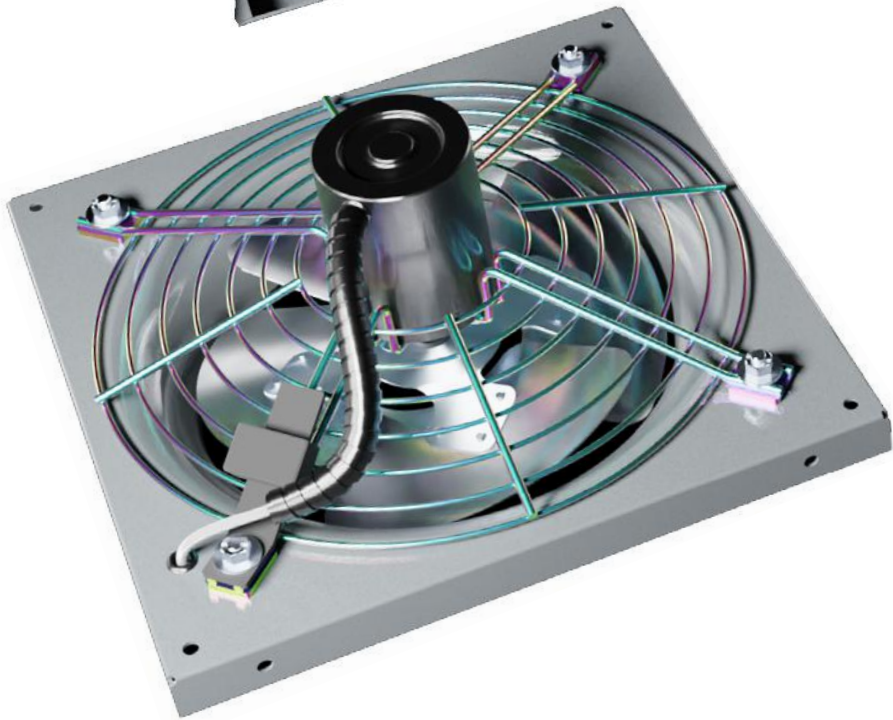

SWF-08 / SWF-10 / SWF-12

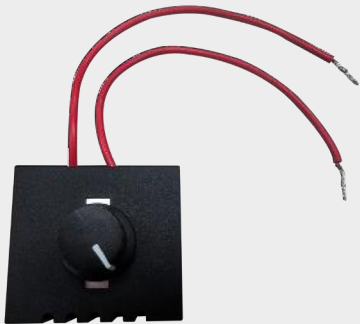

Optional Variable Speed Controller

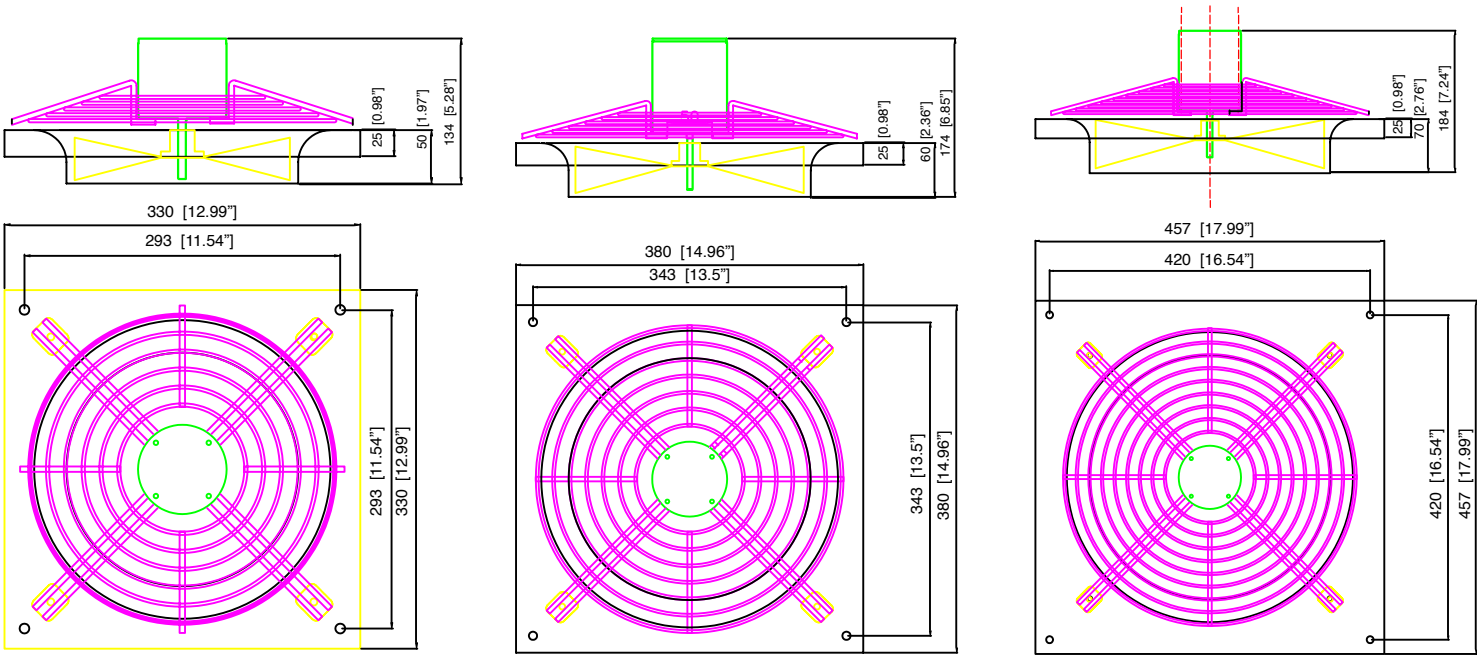

SWF-08

SWF-10

SWF-12

MODEL	VOLTAGE	POWER	FAN RPM	IMPELLER DIA
SWF-.03hp-08	110-120v/60hz/1-ph	1/30HP	1740	8inch
SWF-.04hp-10	110-120v/60hz/1-ph	1/25HP	1720	10inch
SWF-.04hp-12	110-120v/60hz/1-ph	1/25HP	1730	12inch
SWF-.05hp-08	220-240v/60hz/1-ph	1/20HP	1520	8inch
SWF-.1hp-10	220-240v/60hz/1-ph	1/10HP	1730	10inch
SWF-.1hp-12	220-240v/60hz/1-ph	1/10HP	1660	12inch

sales@heavydutysystems.com