



HDSMC-34



HDSMC-49




HDSMC-58



## STANDARD FEATURES

- Cabinet finish: White-coated steel exterior with stainless steel lid and door with lock and latch. Interior is NSF approved white aluminum liner with stainless steel floor.
- Option of all stainless steel exterior available.
- Heavy duty construction: CFC and HCFC-free foamed-in-place polyurethane insulation.
- Refrigeration system: Single access, cold wall milk coolers maintain milk temperature of 33°F-38°F (0.5°C- 3.3°C).
- Preinstalled 4" heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point.
- Bottom floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.


HDSMC-34

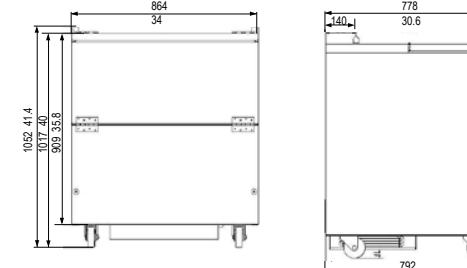

HDSMC-49

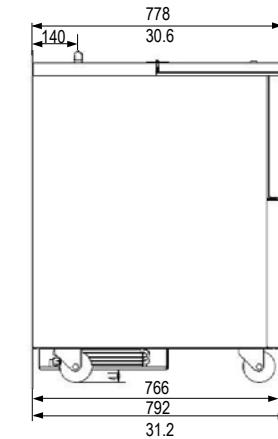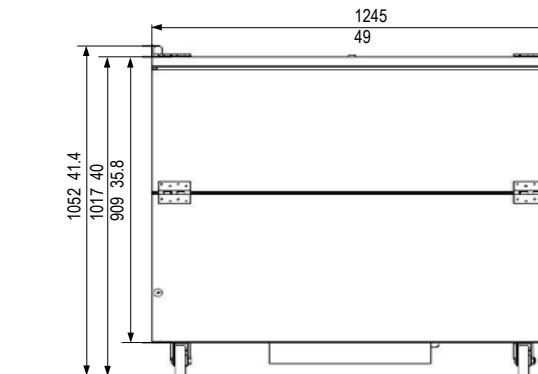

HDSMC-58

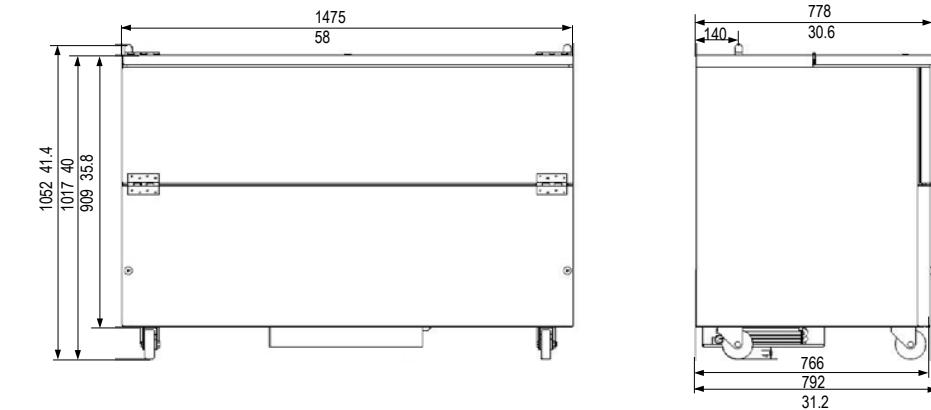

MODEL	LIDS	DIMENSIONS	CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			13"x13"x11"	19"x13"x11"				
HDSMC-34	2	34 x 30 3/5 x 40 in 864 x 778 x 1052 mm	8 cases	4 cases	1/5	2.28	115/60/1	NEMA 5-15P
HDSMC-49	2	49 x 30 3/5 x 40 in 1245 x 778 x 1052 mm	12 cases	8 cases	1/5	2.28	115/60/1	NEMA 5-15P
HDSMC-58	2	58 x 30 3/5 x 40 in 1475 x 778 x 1052 mm	16 cases	10 cases	1/5	2.4	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.