



HDSMR-21-1-LE



HDSMR-25-1-LE




HDSMR-28-1-LE


STANDARD FEATURES

- Exterior: Coated steel. Black or white finish available.
- Anti-Fogging Low E Glass
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F(0.5°C to 5°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Leveling feet or casters are available.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.


HDSMR-21-1

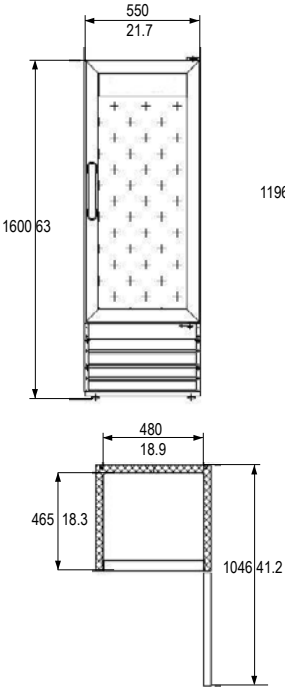

HDSMR-25-1

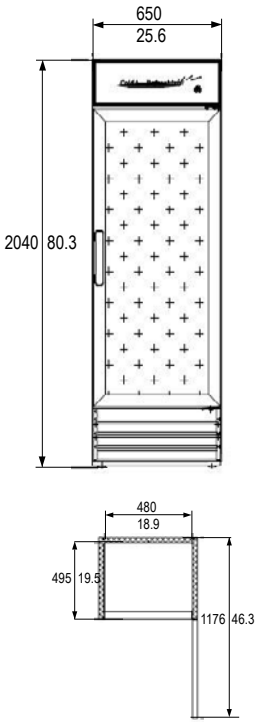

HDSMR-28-1

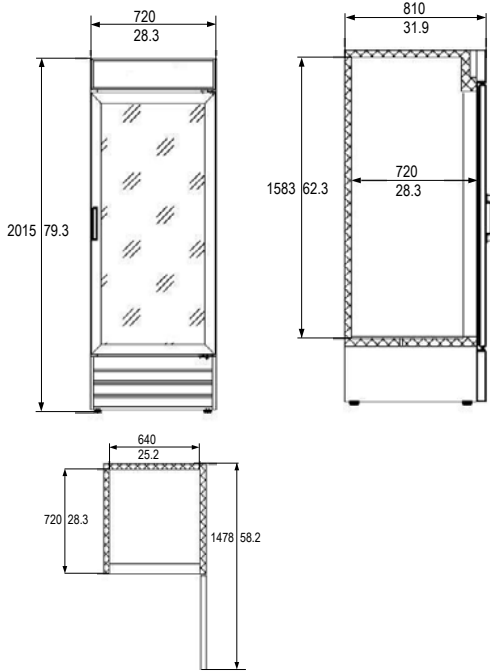

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSMR-21-1-LE	1	4	21 5/8 x 21 5/8 x 63 in 550 x 550 x 1600 mm	9.1 cu.ft. 258 liters	1/5	2.88	115/60/1	NEMA 5-15P
HDSMR-25-1-LE	1	4	25 3/5 x 22 4/5 x 79 3/8 in 650 x 580 x 2015 mm	14 cu.ft. 398 liters	1/5	2.88	115/60/1	NEMA 5-15P
HDSMR-28-1-LE	1	4	28 3/8 x 31 7/8 x 79 3/8 in 720 x 810 x 2015 mm	23 cu.ft. 648 liters	1/5	3	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.



HDSMR-48-2-LE

HDSMR-53-2-LE




HDSMR-78-3-LE


STANDARD FEATURES

- Exterior: Coated steel. Black or white finish available.
- Anti-Fogging Low E Glass
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F(0.5°C to 5°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Leveling feet or casters are available.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.


HDSMR-48-2

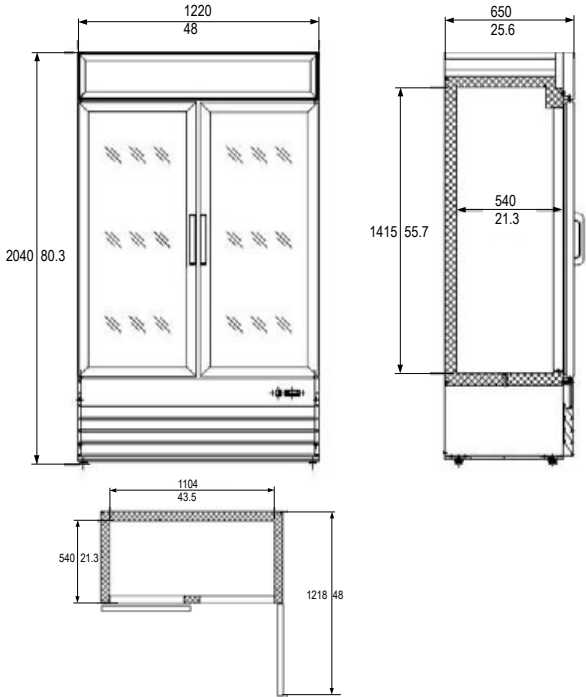

HDSMR-53-2

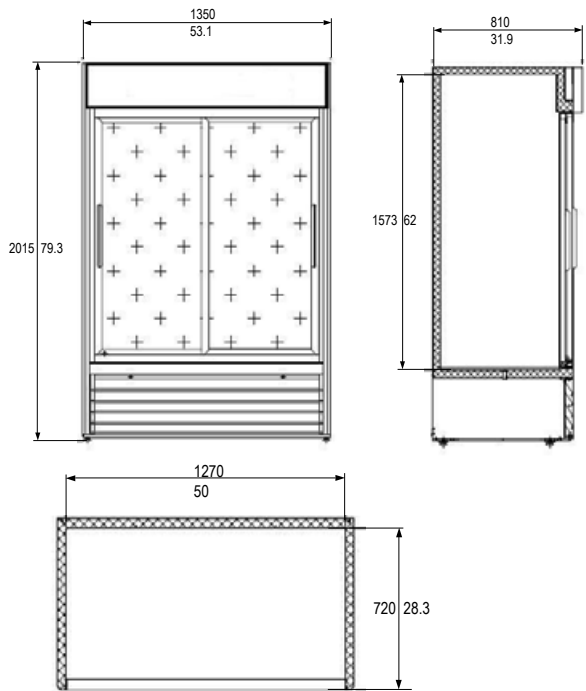

HDSMR-78-3

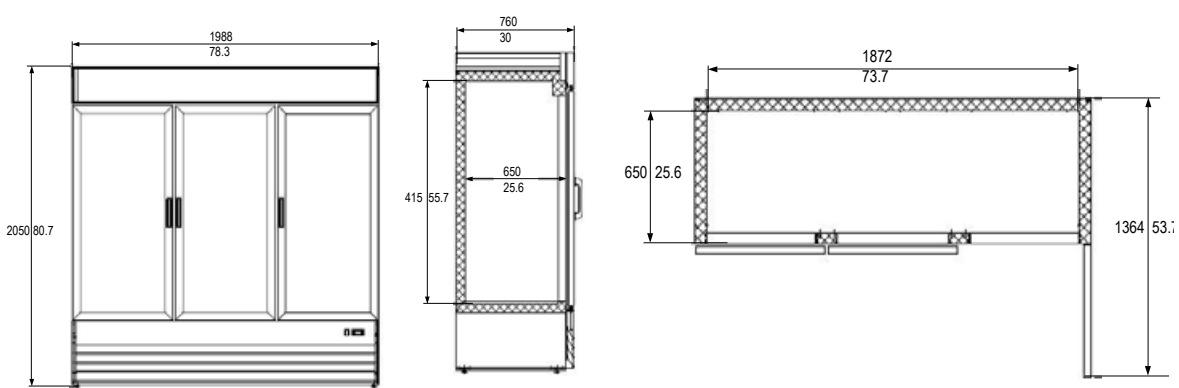

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSMR-48-2-LE	2	8	48 x 25 3/5 x 80 3/8 in 1220 x 650 x 2040 mm	29 cu.ft. 830 liters	1/4+	4.8	115/60/1	NEMA 5-15P
HDSMR-53-2-LE	2	8	53 1/8 x 31 7/8 x 79 3/8 in 1350 x 810 x 2015 mm	45 cu.ft. 1270 liters	1/4+	4.3	115/60/1	NEMA 5-15P
HDSMR-78-3-LE	3	12	78 3/8 x 30 x 80 3/4 in 1988 x 760 x 2050 mm	53 cu.ft. 1500 liters	3/4	10.7	115/60/1	NEMA 5-20P

sales@heavydutysystems.com

Voltage 220/50/1 available.