



HDSR-1S



HDSR-2S




HDSR-3S


STANDARD FEATURES

- Stainless steel exterior, stainless steel interior, aluminum back.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Preinstalled 4" heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- Option of different handles available.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.


HDSR/F-1S/G

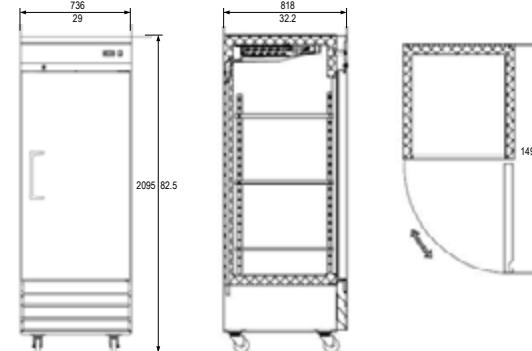

HDSR/F-2S/G

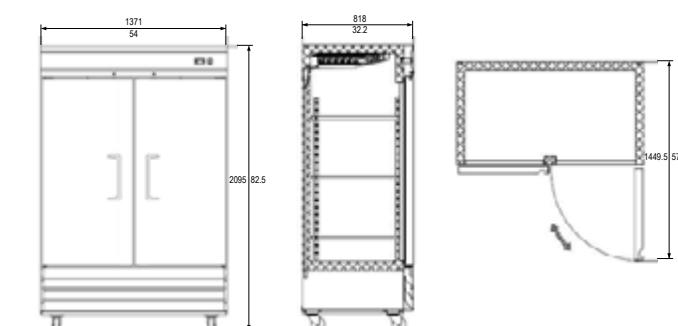

HDSR/F-3S/G

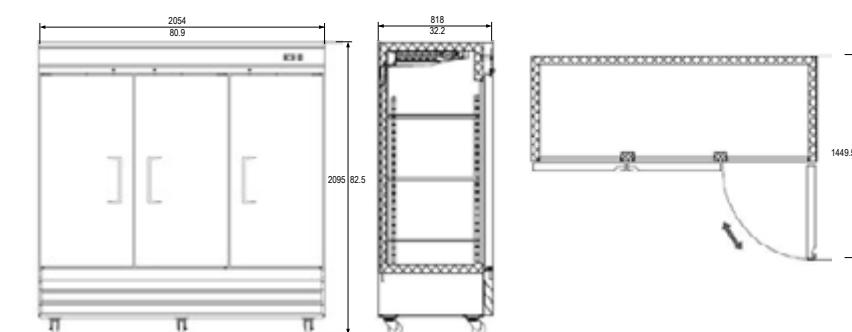

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSR-1S	1	3	29 x 32 1/4 x 82 1/2 in 736 x 818 x 2095 mm	23 cu.ft. 650 liters	1/5	2.6	115/60/1	NEMA 5-15P
HDSR-2S	2	6	54 x 32 1/4 x 82 1/2 in 1371 x 818 x 2095 mm	47 cu.ft. 1321 liters	1/4+	3.8	115/60/1	NEMA 5-15P
HDSR-3S	3	9	80 9/10 x 32 1/4 x 82 1/2 in 2054 x 818 x 2095 mm	23 cu.ft. 2040 liters	3/4+	9	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.