




STANDARD FEATURES


- Stainless steel exterior, stainless steel interior, aluminum back.
- Refrigeration system keeps food at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Preinstalled 4” heavy-duty casters with brakes.
- Option of different handles available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- Cutting board thickness:

20MM – Exterior/Interior SS304 or Exterior SS430/Interior SS304


15MM- Exterior SS430/Interior painted aluminum
- Polycarbonate pans (per pan layout) included standard
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.

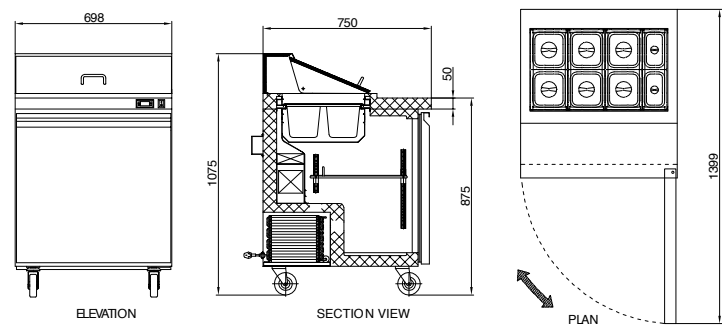


HDSSP-1S-28-8

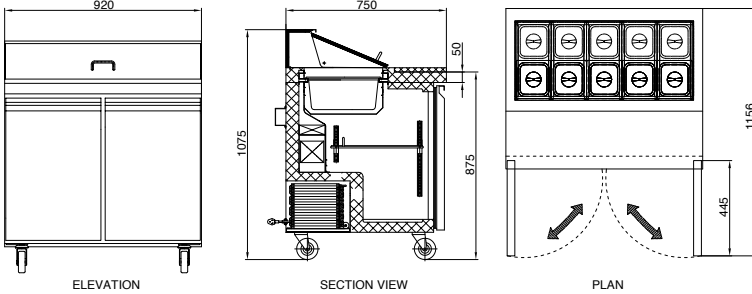


HDSSP-2S-36-10

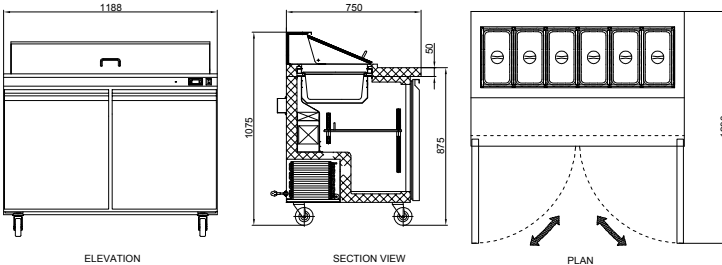

HDSSP-2S-47-12

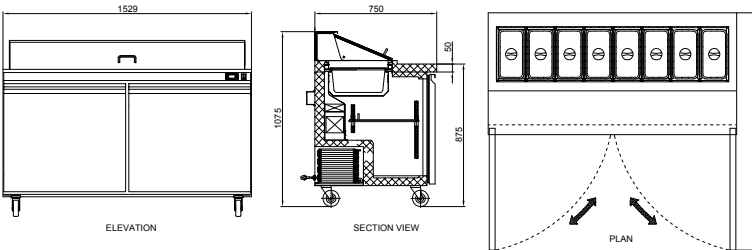

HDSSP-2S-60-16

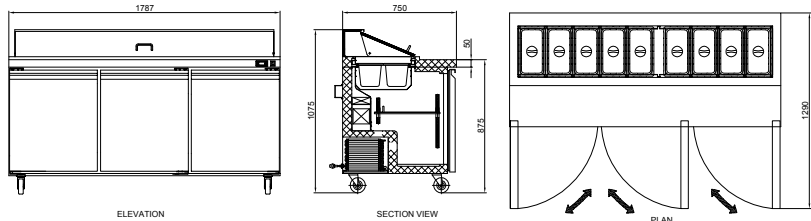

HDSSP-3S-70-18

MODEL	DOORS	SHELVES	PAN LAYOUT	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSSP- 1S-28-8	1	1	6x1/6 + 2x1/9	27 1/2 x 29 1/2 x 42 3/8 in 698 x 750 x 1075 mm	5.7 cu.ft. 160 liters	1/5	2.88	115/60/1	NEMA 5-15P
HDSSP- 2S-36-10	2	2	10x1/6	36 1/4 x 29 1/2 x 42 3/8 in 920 x 750 x 1075 mm	7.6 cu.ft. 213 liters	1/5	3.24	115/60/1	NEMA 5-15P
HDSSP- 2S-47-12	2	2	12x1/6	46 7/8 x 29 1/2 x 42 3/8 in 1188 x 750 x 1075 mm	9.5 cu.ft. 268 liters	1/4+	4.56	115/60/1	NEMA 5-15P
HDSSP-2S-60-16	2	2	16x1/6	60 1/5 x 29 1/2 x 42 3/8 in 1529 x 750 x 1075 mm	15 cu.ft. 428 liters	1/4+	4.8	115/60/1	NEMA 5-15P
HDSSP-3S-70-18	3	3	18X1/6	70 2/5 x 29 1/2 x 42 3/8 in 1787 x 750 x 1075 mm	15.5 cu.ft. 440 liters	3/4	8.9	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.



HDSSP-1S-28-8



HDSSP-2S-36-10



HDSSP-2S-47-12



HDSSP-2S-60-16



HDSSP-3S-70-18