



HDSUCF-1S-27



HDSUCF-2S-47




HDSUCF-2S-60

STANDARD FEATURES




- Stainless steel exterior, stainless steel interior, aluminum back.
- Refrigeration system keeps food at safe temperatures between -8°F and 0°F (-22°C to -18°C).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Option of Backsplashes available.
- Preinstalled 4" heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- Option of different handles available.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.





HDSUCR/F-1S-27

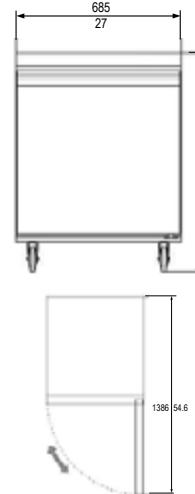

HDSUCR/F-2S-47



HDSUCR/F-2S-60

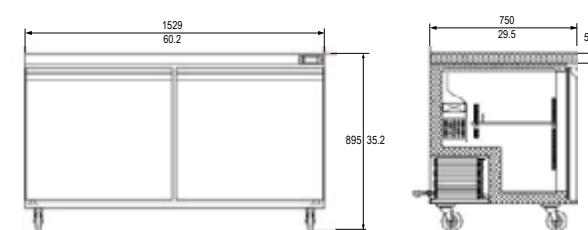

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSUCF- 1S-27	1	1	27 x 29 1/2 x 35 1/5 in 685 x 750 x 895 mm	6.3 cu.ft. 177 liters	1/5	2.1	115/60/1	NEMA 5-15P
HDSUCF- 2S-47	2	2	47 1/5 x 29 1/2 x 35 1/5 in 1200 x 750 x 895 mm	12 cu.ft. 338 liters	1/4+	4.5	115/60/1	NEMA 5-15P
HDSUCF- 2S-60	2	2	60 1/5 x 29 1/2 x 35 1/5 in 1526 x 750 x 895 mm	15 cu.ft. 428 liters	1/2+	6.36	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.