



HDSBC-10




HDSBC-22




HDSBC-44

STANDARD FEATURES


- HDSBC-10
- Stainless steel structure
- Good insulation to improve holding efficiency
- 110°C (230°F) EGO thermostat controlled, durable and robust
- Temperature display on top to read holding temperature
- Water-proof on/off switch
- Double durable stainless steel round heating element
- Forced air circulation with special baffle plate
- Stainless steel lock
- Four swivel heavy duty 6” castors with brake
- Bumpers all around to provide better protection while transportation
- Recessed hand-grasping handle on both sides Rubber seal on the doors
- Bottom water tray to keep food humidity when needed
- GN2/1 wire grid
- Available in 3 different sizes
- Thermostats (if applicable) available in either Fahrenheit or Celsius
- Available in various electrical power setups (power setups available for all areas of the world)
- Power may vary based on specified electrical setup

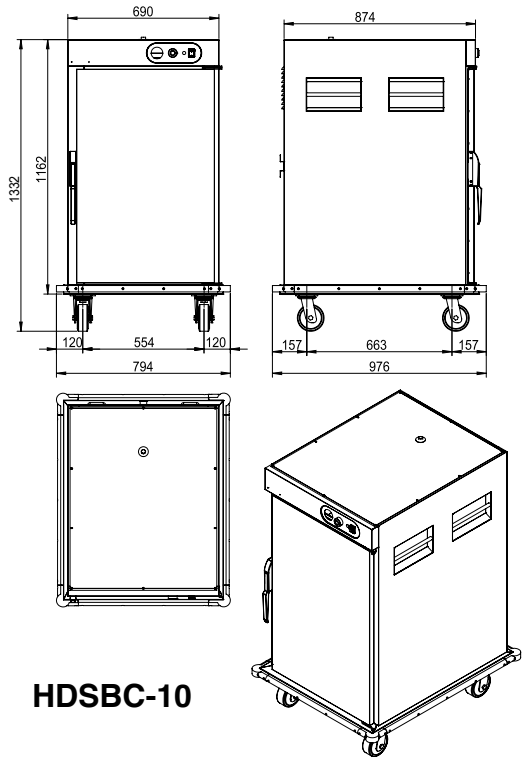

HDSBC-10

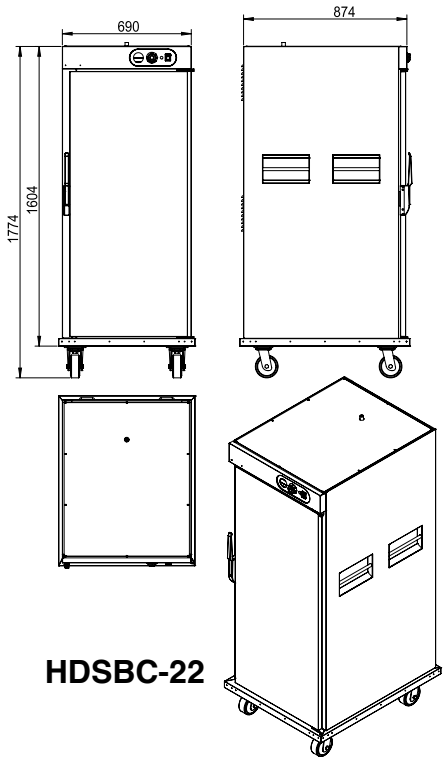

HDSBC-22

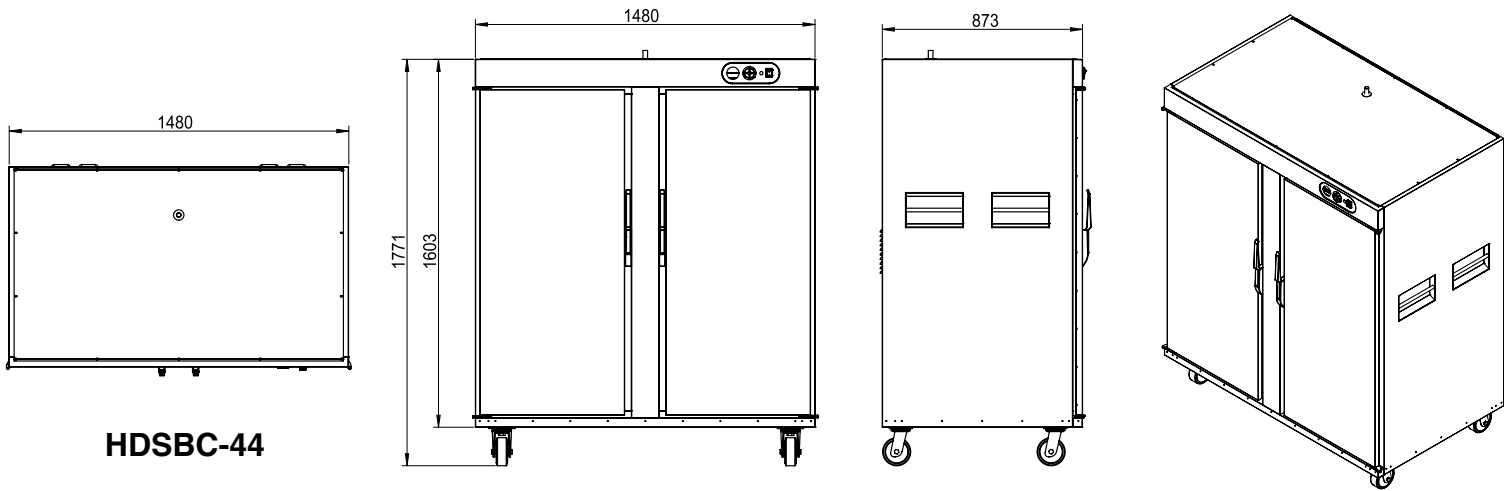

HDSBC-44

| MODEL    | CAPACITY    | POWER  | TEMPERATURE              | PRODUCT (WxDxH)                           | NW                |
|----------|-------------|--------|--------------------------|-------------------------------------------|-------------------|
| HDSBC-10 | 10 x GN 1/1 | 2570 W | 30 - 110°C<br>86 - 230°F | 780 x 960 x 1355 mm<br>31 x 38 x 53 inch  | 145 kg<br>319 lbs |
| HDSBC-22 | 22 x GN 1/1 | 2570 W | 30 - 110°C<br>86 - 230°F | 780 x 960 x 1755 mm<br>v31 x 38 x 69 inch | 182 kg<br>400 lbs |
| HDSBC-44 | 44 x GN 1/1 | 2570 W | 30 - 110°C<br>86 - 230°F | 1540 x 960 x 1755 mm<br>61 x 38 x 69 inch | 318 kg<br>700 lbs |

sales@heavydutysystems.com