




HDSBPE-80


STANDARD FEATURES

- All stainless steel structure
- 80L/60L capacity pan
- SS316 pan bottom
- Tilting pan design for easy unloading
- Temperature can be adjusted from 60~300°C (140~572°F)
- 340°C (644°F) hi limit for safety Multi functional unit
- Thermal coupling for gas safety Standby pilot
- Stainless steel cabinet door

- Thermostats (if applicable) available in either Fahrenheit or Celsius
- Available in various electrical power setups (power setups available for all areas of the world)
- Power may vary based on specified electrical setup

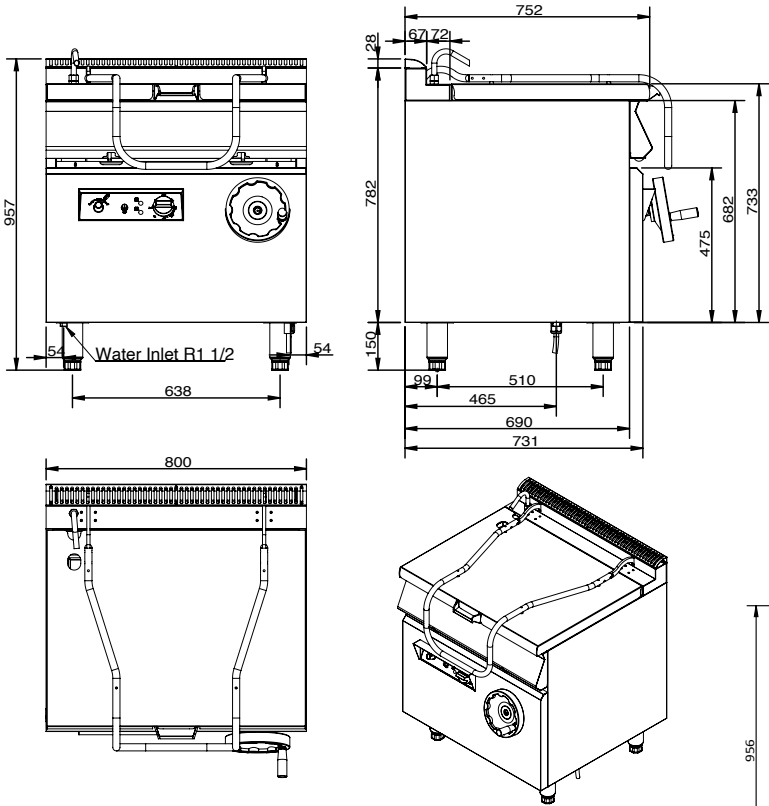

HDSBPE-60

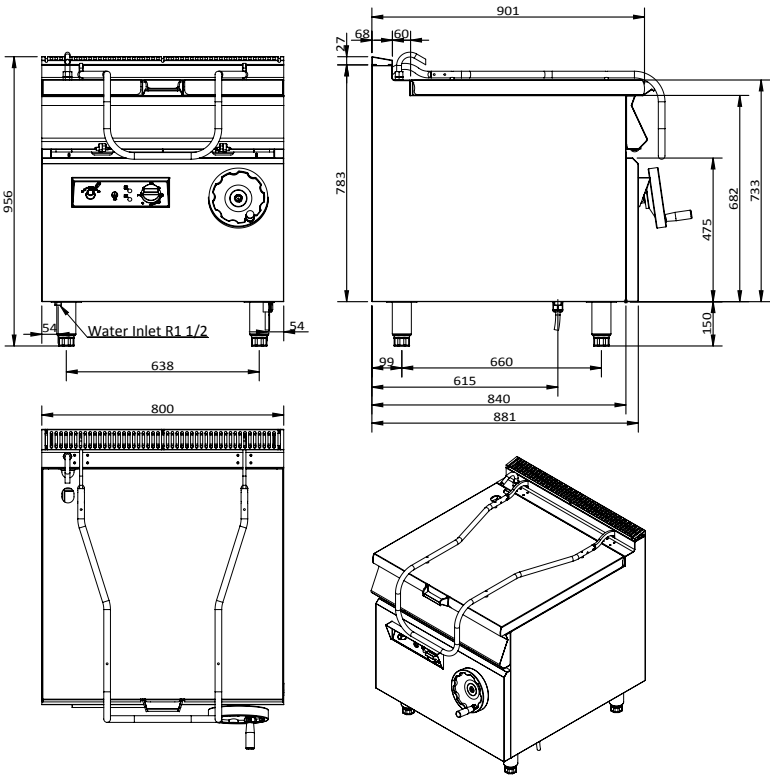

HDSBPE-80

MODEL	PRODUCT (WxDxH)	CAPACITY	POWER	GW	NW
HDSBPE-60	800 x 750 x 850 mm 32 x 30 x 34 inches	60 L	9.3kW	185 kg 407 lbs	122 kg 268 lbs
HDSBPE-80	800 x 900 x 850 mm 32 x 35 x 34 inches	80 L	21kW	206 kg 453 lbs	135 kg 297 lbs

sales@heavydutysystems.com