




HDSCG-24E

STANDARD FEATURES


- Stainless steel front and sides
- Stainless steel heating elements
- To be controlled every 12 “
- EGO thermostat, temperature range 122~572°F (50~300 °C)
- 3/4 “ thickness polished griddle plate
- Adjustable heavy duty legs
- Grease through channel in the front
- Stainless steel oil collector in the bottom
- Stainless steel splash guard at 3 sides

- Thermostats (if applicable) available in either Fahrenheit or Celsius
- Available in various electrical power setups (power setups available for all areas of the world)
- Power may vary based on specified electrical setup

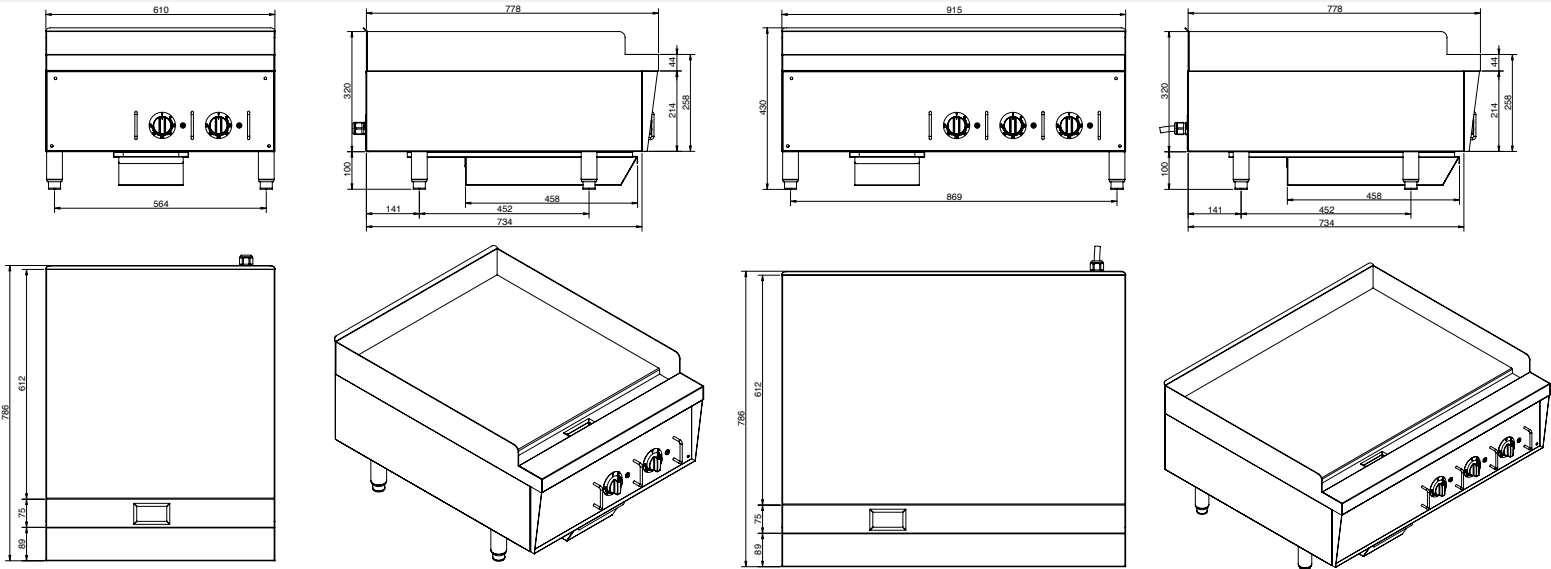

HDSCG-24E

HDSCG-36E

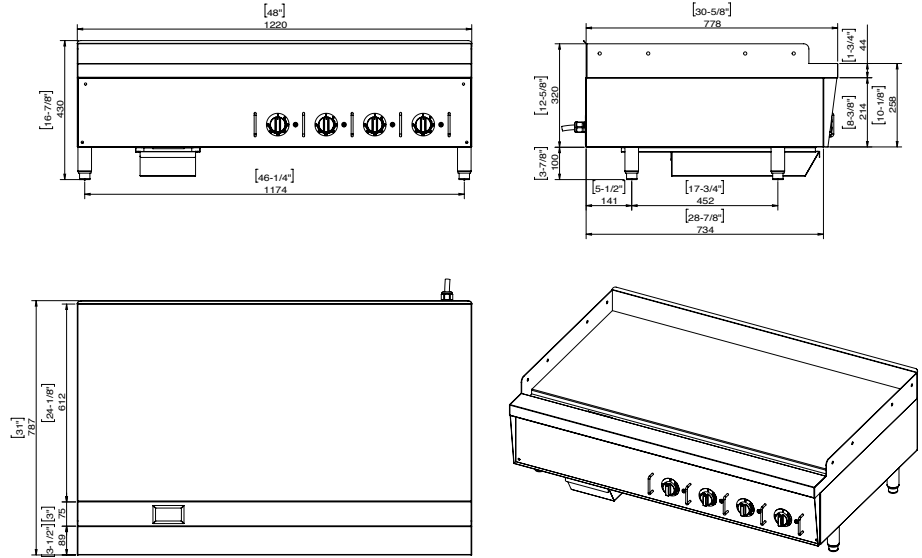

HDSCG-48E

MODEL	PRODUCT (WxDxH)	POWER	CONTROL	COOKING DIMENSION	NW
HDSCG-24E	610 x 786 x 420 mm 24 x 30.9 x 16.5 inch	8 kW	2	610 x 610 mm 24 x 24 in	92
HDSCG-36E	915 x 786 x 420 mm 36 x 30.9 x 16.5 inch	12 kW	3	915 x 610 mm 36 x 24 in	129
HDSCG-48E	1220 x 786 x 420 mm 48 x 30.9 x 16.5 inch	16 kW	4	1220 x 610 mm 48 x 24 in	169

sales@heavydutysystems.com