




HDSE-36C

STANDARD FEATURES


- Stainless steel front and sides
- Electric hotplate, 2.6kw and 2kw combination
 - Half of the hotplate are 2.6kw, half of the hotplate are 2kw
- Thermostat (122- 500°F / 50 - 260 °C) controlled oven
- Cooling switch to reduce cavity temperature quickly
- Double circulating fans to ensure temperature evenness
- Welded frame structure for best stability
- Three groups of heating element in the oven
- Adjustable heavy duty legs
- A pull-out baffle plate with angled handle in the front
- Stainless steel oven door with good insulation
- Stainless steel handle for bottom oven
- Kick plate at the bottom for easy access for servicing

- Thermostats (if applicable) available in either Fahrenheit or Celsius
- Available in various electrical power setups (power setups available for all areas of the world)
- Power may vary based on specified electrical setup

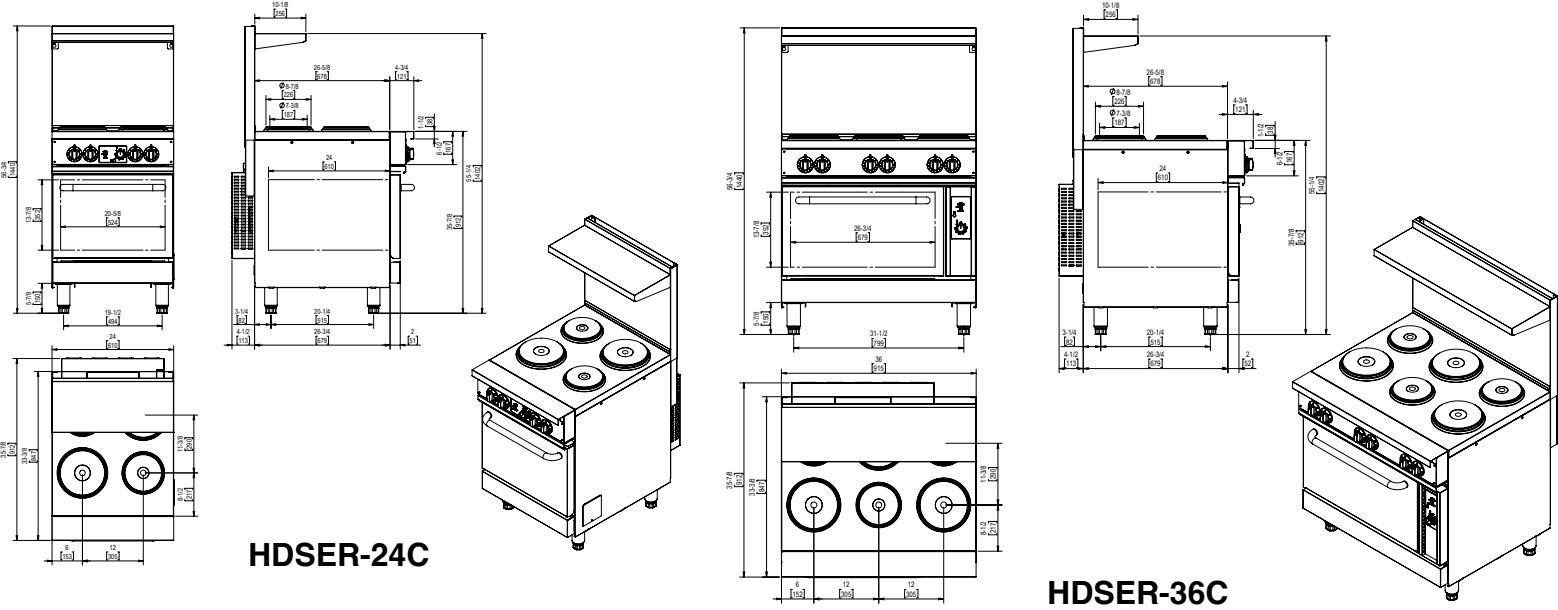

HDSE-24C

HDSE-36C

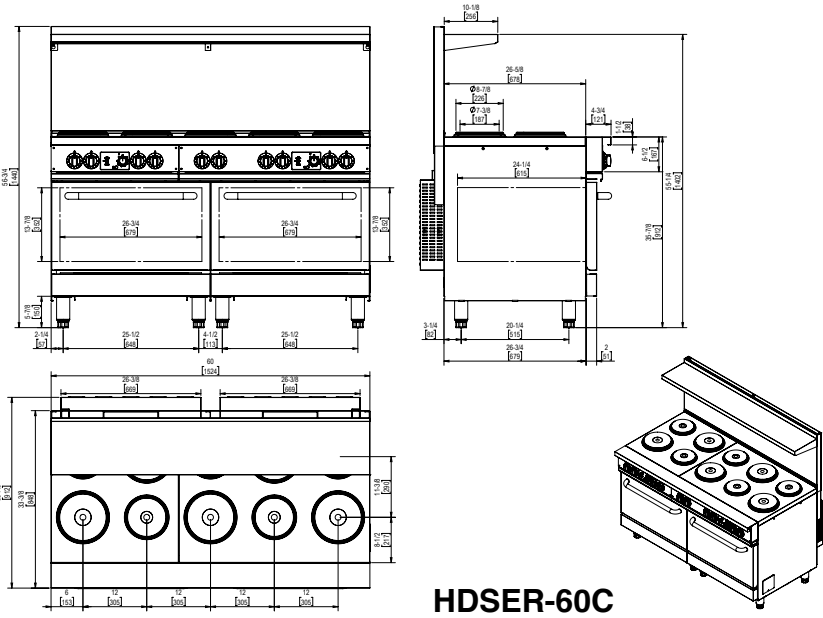

HDSE-60C

MODEL	PRODUCT (WxDxH)	POWER	OVEN DIMENSION	NW
HDSE-24C	610 x 912 x 1440 mm 24 x 35.9 x 56.7 inch	13.6 kW	20.5 x 25.8 x 13.9 inch	132 kg 291 lbs
HDSE-36C	915 x 912 x 1440 mm 36 x 35.9 x 56.7 inch	18.2 kW	26.5 x 25.8 x 13.9 inch	167 kg 368 lbs
HDSE-60C	1524 x 912 x 1440 mm 60 x 35.9 x 56.7 inch	31.8 kW	26.6 x 25.8 x 13.9 inch	280 kg 617 lbs

sales@heavydutysystems.com