




HDSPWSC-40



HDSPWSC-40-2

STANDARD FEATURES

- All stainless steel structure
- Thermostat controlled, durable and robust
- On/off power switch
- Temperature range 30-85°C (86-185°F)
- Adjustable plate guiding rail to suite different sizes of plates
- Convection design to reduce pre-heating time
- Stainless steel heating element
- Cool-to-touch Bakelite handle
- Adjustable spring tension for loading different quantity
- Four swivel castors with brake
- Optional black cover

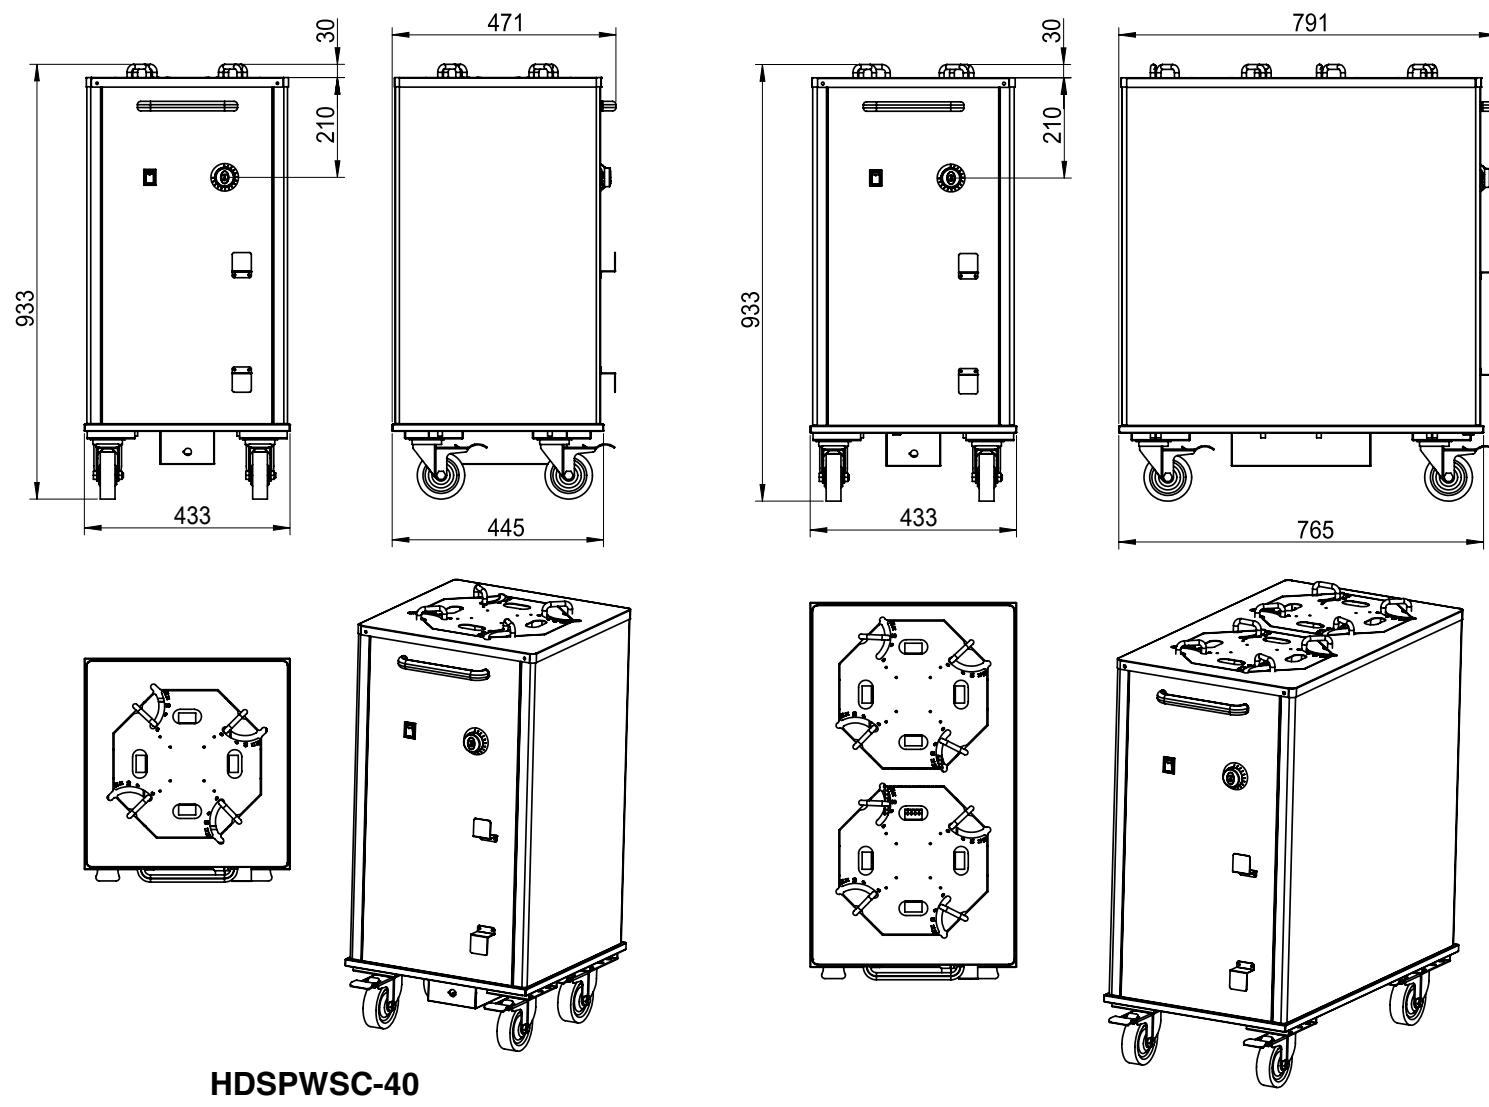

HDSPWSC-40

HDSPWSC-40-2

- Thermostats (if applicable) available in either Fahrenheit or Celsius
- Available in various electrical power setups (power setups available for all areas of the world)
- Power may vary based on specified electrical setup

MODEL	PRODUCT (WxDxH)	CAPACITY	PLATE SIZE	POWER	NW
HDSPWSC-40	435 x 520 x 1025 mm 17 x 21 x 40 inch	40	Max dia 300 mm Max dia 12 inch	1000 W	28 kg 62 lbs
HDSPWSC-40-2	435 x 815 x 1025 mm 17 x 32 x 40 inch	2 x 40	Max dia 300 mm Max dia 12 inch	2000 W	43.5 kg 96 lbs

sales@heavydutysystems.com