



HDSSRBC-36




HDSSRBC-48



HDSSRBC-60

STANDARD FEATURES

- Stainless Steel Interior and Exterior
- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost

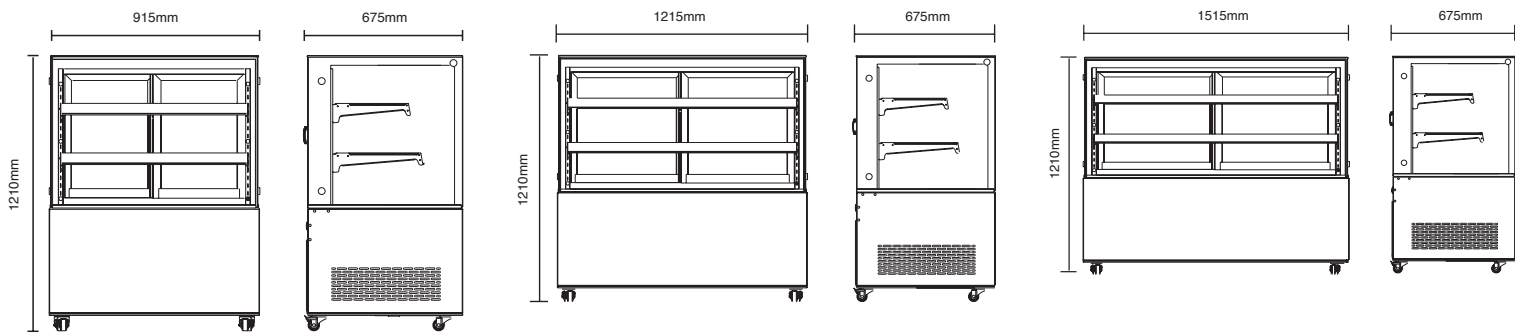

HDSSRBC-36

HDSSRBC-48

HDSSRBC-60

MODEL	HDSSRBC-36	HDSSRBC-48	HDSSRBC-60
Capacity-Cu.Ft.	10.4Cu.Ft.	14.1Cu.Ft.	18.0Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	390W/3.7A	400W/3.7A	420W/4.0A
Horsepower	1/2HP	1/2HP	1/2HP
Refrigerant	R290	R290	R290
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)
Overall Dimension	915×675×1210mm	1215×675×1210mm	1515×675×1210mm
Overall Dimension	36.0×26.6×47.6inch	47.8×26.6×47.6inch	59.6×26.6×47.6inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch
Voltage 220/50/1 Available			