



HDSMF-26-1


HDSMF-27-1



HDSMF-31-1

STANDARD FEATURES

- Exterior: Coated steel. Black or white finish available.
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between -10°F and 0°F (-23°C to -18°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Leveling feet or casters are available.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.

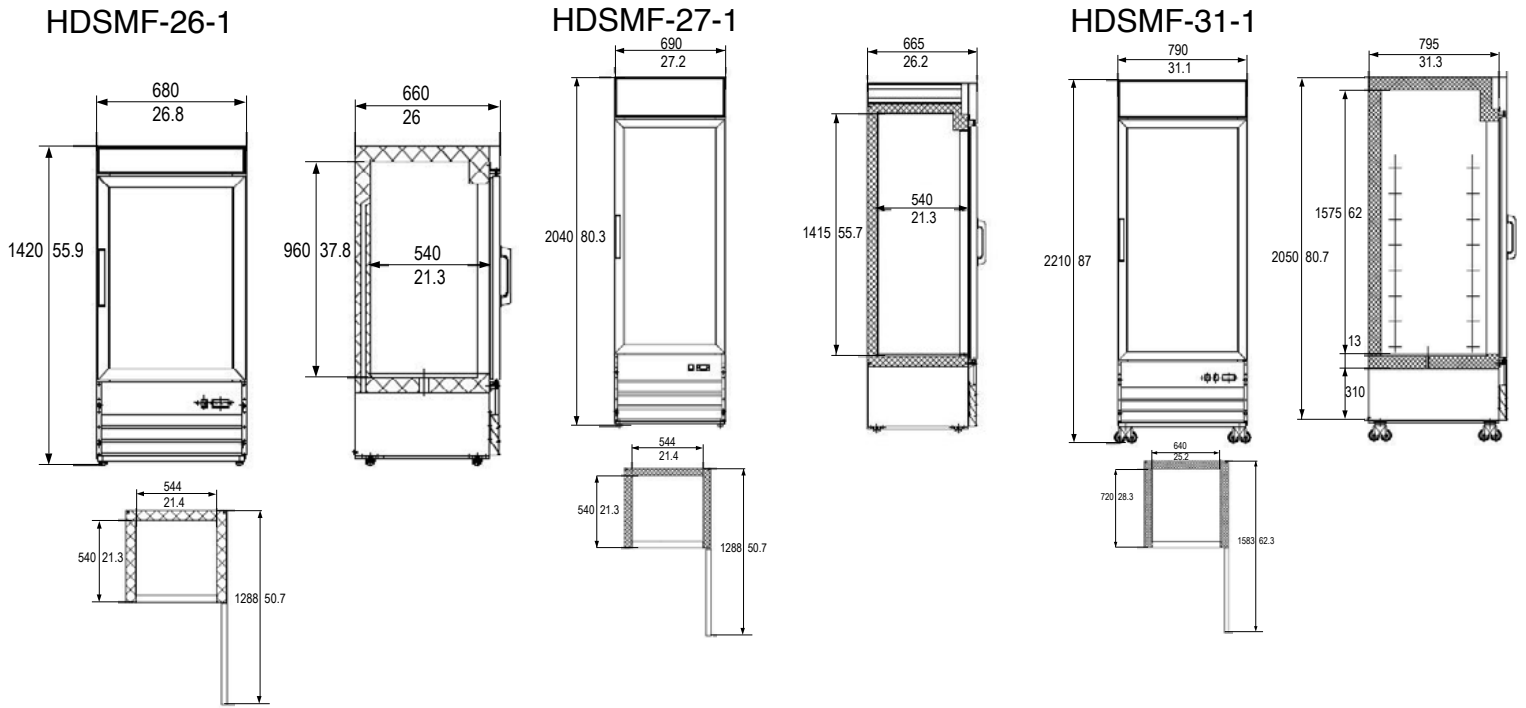

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSMF-26-1	1	2	26 4/5 x 26 x 55 7/8 in 680 x 660 x 1420 mm	8.5 cu.ft. 240 liters	1/4+	3.5	115/60/1	NEMA 5-15P
HDSMF-27-1	1	4	27 1/5 x 26 1/5 x 80 3/8 in 690 x 665 x 2040 mm	13 cu.ft. 368 liters	3/4	8.8	115/60/1	NEMA 5-15P
HDSMF-31-1	1	4	31 1/8 x 31 3/8 x 80 3/4 in 790 x 795 x 2050 mm	23 cu.ft. 648 liters	3/4	9.4	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.



HDSMF-49-2





HDSMF-53-2





HDSMF-79-3

STANDARD FEATURES




- Exterior: Coated steel. Black or white finish available.
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between -10°F and 0°F (-23°C to -18°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Leveling feet or casters are available.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.

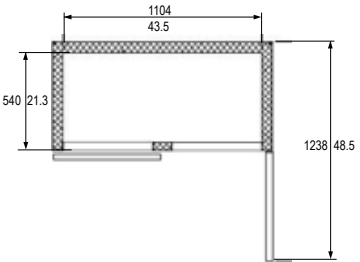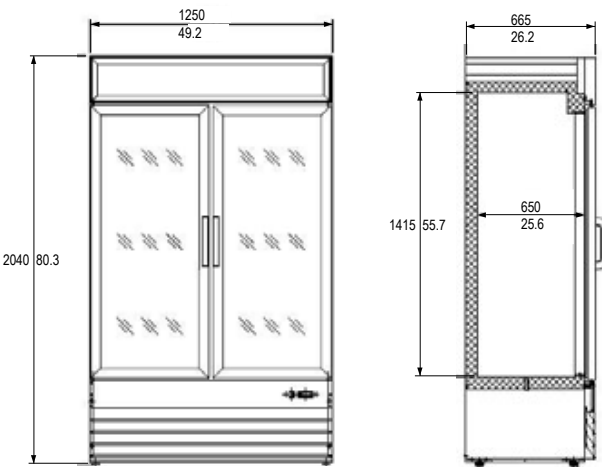

HDSMF-49-2

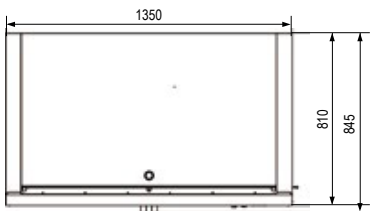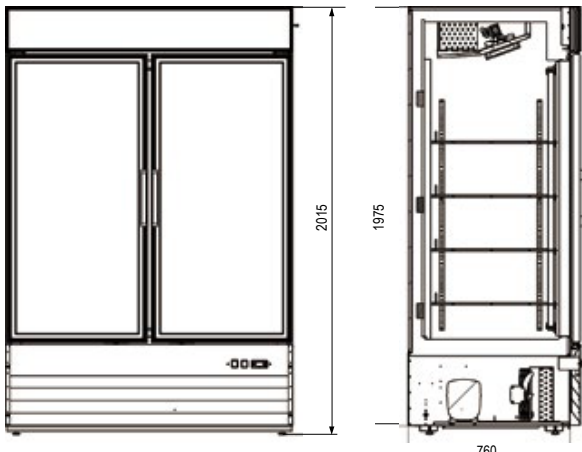

HDSMF-53-2

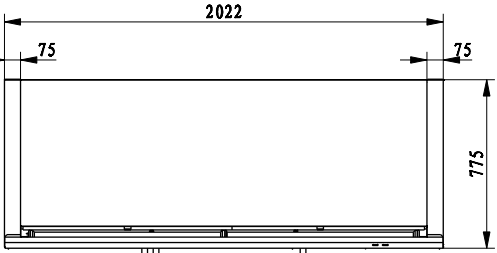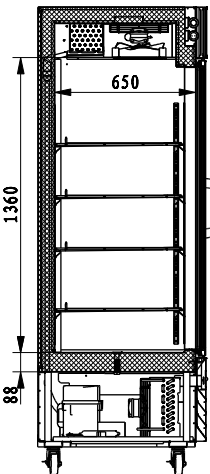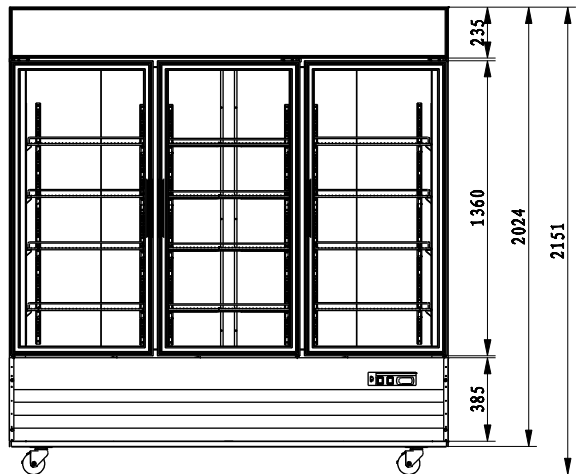

HDSMF-79-3

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSMF-49-2	2	8	49 1/5 x 26 1/5 x 80 3/8 in 1250 x 665 x 2040 mm	29 cu.ft. 830 liters	3/4	9.4	115/60/1	NEMA 5-15P
HDSMF-53-2	2	8	53 1/8 x 31 7/8 x 79 3/8 in 1350 x 810 x 2015 mm	45 cu.ft. 1270 liters	1	9.2	115/60/1	NEMA 5-15P
HDSMF-79-3	3	12	79 1/2 x 30 3/5 x 80 3/4 in 2020 x 777 x 2050 mm	52 cu.ft. 1479 liters	3/4 x 2	16.3	115/60/1	NEMA 5-20P

sales@heavydutysystems.com

Voltage 220/50/1 available.