

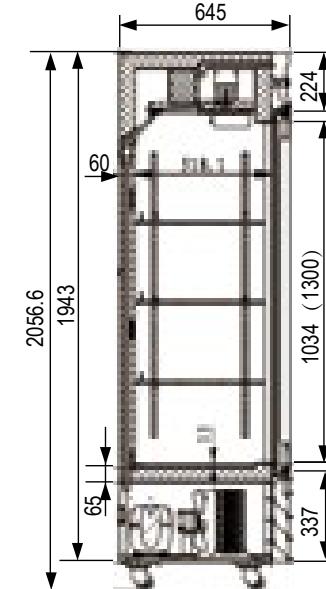




HDSR/F-19

STANDARD FEATURES

- Stainless steel exterior, stainless steel interior, aluminum back.
- Refrigeration system keeps food at safe temperatures:
 - HDSR-19—between 33°F and 41°F (0.5°C to 5°C)
 - HDSF-19 –between -8°F and 0°F (-17°C to -22°C)
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy PVC coated shelves.
- Preinstalled 4" heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.

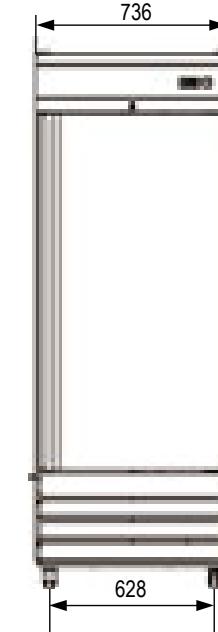

HDSR/F-19

MODEL	TEMP	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSR-19	33°F ~ 41°F	3	29 x 25 1/5 x 82 1/2 in 736 x 648 x 2095 mm	19 cu.ft. 538 liters	1/5	2.8	115/60/1	NEMA 5-15P
HDSF-19	-8°F ~ 0°F	3	29 x 25 1/5 x 82 1/2 in 736 x 648 x 2095 mm	19 cu.ft. 538 liters	1/2+	8.28	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.