




Designed In USA.

HEAVY DUTY SYSTEMS DISPLAY EQUIPMENT

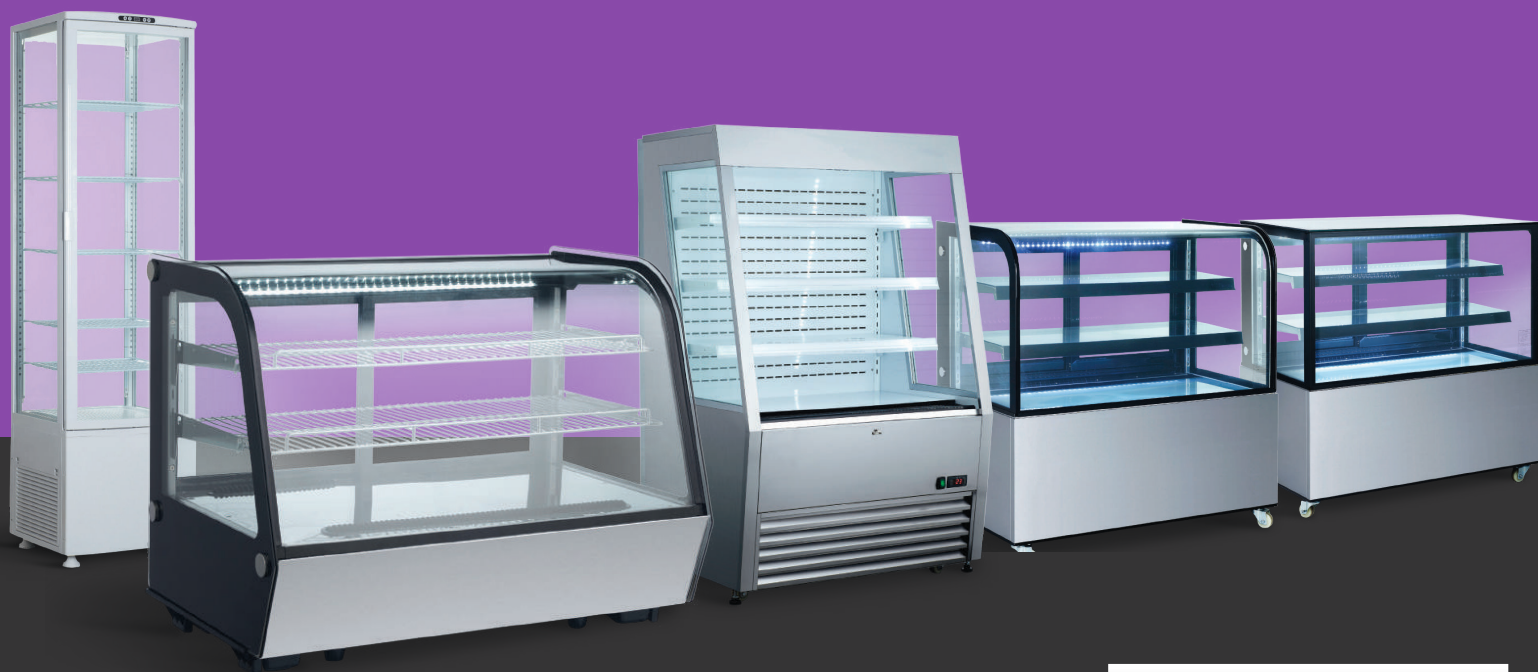

**PERFORMANCE.
DURABILITY.
VALUE.**





Air duct outside the glass to remove condensation water




HDSRCTD-34



STANDARD FEATURES

- Brilliant Internal LED illumination on top
- Digital temperature controller and display
- Adjustable chrome plated shelves
- 4 sides double glass
- Front Curved glass
- Sliding doors
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost
- Stainless Steel Interior and Exterior Base
- Air duct outside the glass to remove condensation water

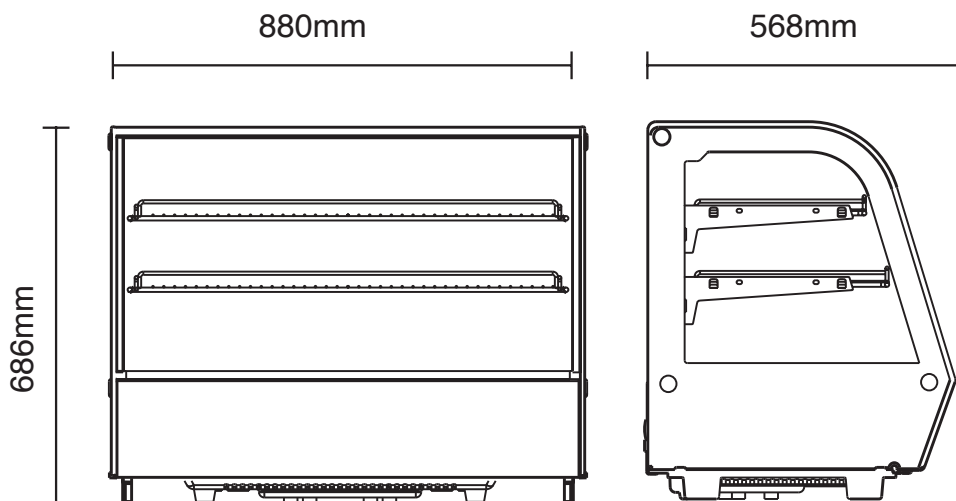

MODEL	HDSRCTD-34
Capacity-Cu.Ft.	5.7Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1
Rated Input Power	330W/3A
Horsepower	1/3HP
Refrigerant	R290
N.W.	66kg(145.5lbs)
G.W.	69.5kg(153.2lbs)
Overall Dimension	880×568×686mm
Overall Dimension	34.6×22.4×27.0inch
Package Dimmension	951×627×735mm
Package Dimmension	37.4×24.7×28.9inch
Voltage 220/50/1 Available	






LED Lights

Temperature
Controller**HDSHCTD-34****STANDARD FEATURES**

- Brilliant Internal LED illumination on top
- Stainless Steel Interior and Exterior
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front Curved glass
- Sliding doors

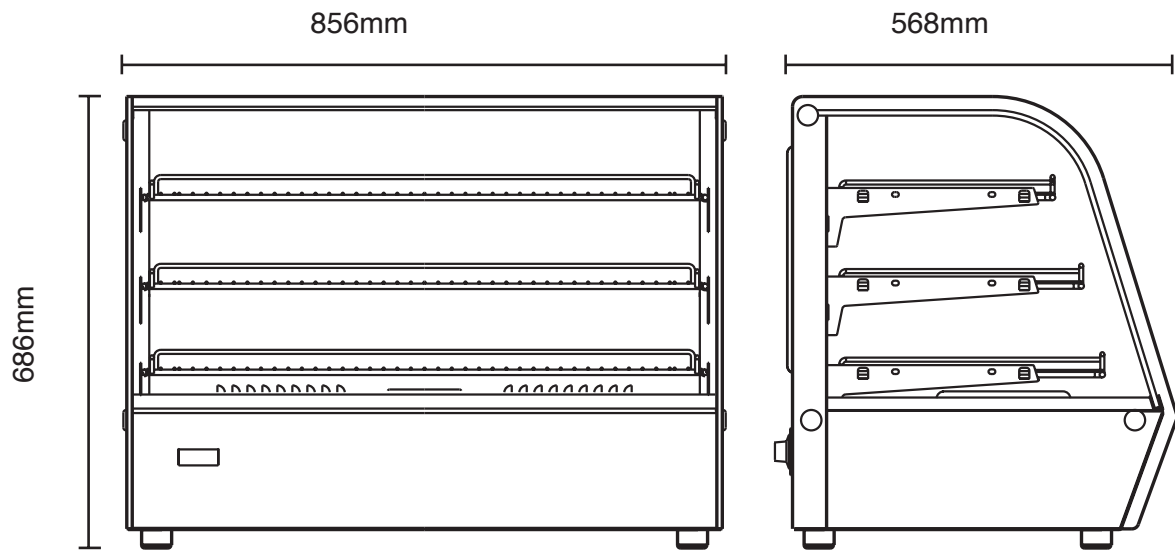



MODEL	HDSHCTD-34
Capacity-Cu.Ft.	5.7Cu.Ft.
Temperature range	30-90°C (86-194 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1
Rated Input Power	1500W/13.1A
N.W.	43kg(94.8lbs)
G.W.	46kg(101.4lbs)
Overall Dimension	856×568×686mm
Overall Dimension	33.7×22.4×27.0inch
Package Dimmension	928×627×731mm
Package Dimmension	36.5×24.7×28.8inch
Voltage 220/50/1 Available	



**HDSRCTM-17****STANDARD FEATURES**

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Front curved glass door
- 4 sides double glass
- Maintenance free condenser
- Ventilated cooling system
- Automatic defrost



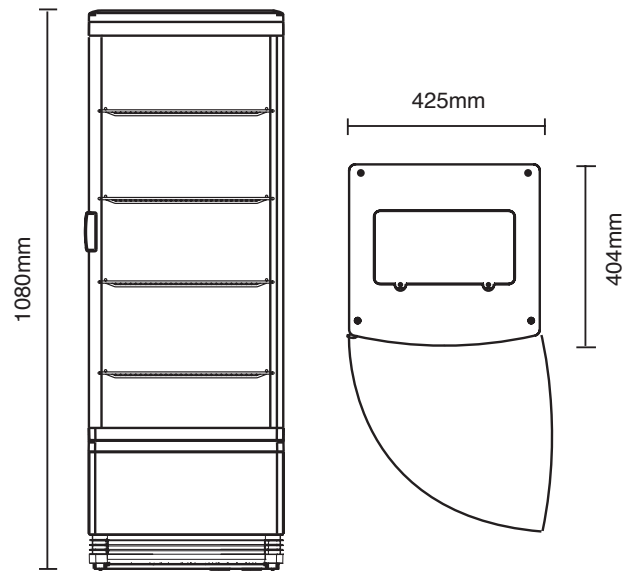


MODEL	HDSRCTM-17
Capacity-Cu.Ft.	3.4Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1
Rated Input Power	190W/1.7A
Horsepower	1/6HP
Refrigerant	R290
N.W.	38.5kg(84.9lbs)
G.W.	41kg(90.4lbs)
Overall Dimension	425x404x1080mm
Overall Dimension	16.7x15.9x42.5inch
Package Dimmension	480x450x1135mm
Package Dimmension	18.9x17.7x44.7inch
Colour	White/Black/Silver


Voltage 220/50/1 Available



**HDSRFM-20****STANDARD FEATURES**

- Brilliant Internal LED illumination on sides
- Digital temperature controller and display
- Adjustable PVC coated shelves
- Front curved glass door
- 4 sides double glass
- Base Feet
- Ventilated cooling system
- Automatic defrost



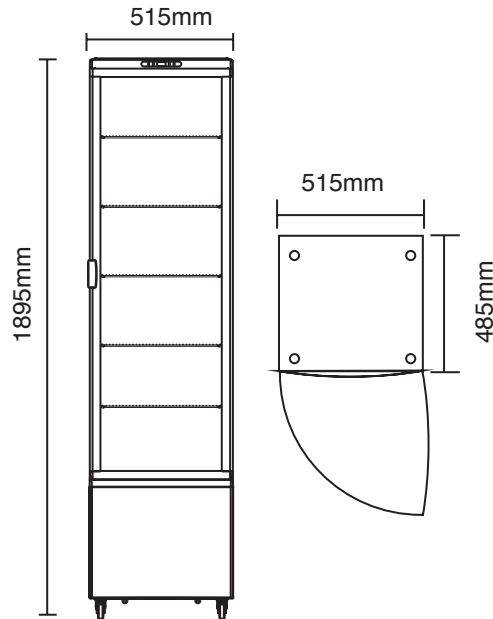


MODEL	HDSRFM-20
Capacity-Cu.Ft.	9.5Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1
Rated Input Power	380W/3.4A
Horsepower	1/3HP
Refrigerant	R290
N.W.	89kg(196.2lbs)
G.W.	94.1kg(207.5lbs)
Overall Dimension	515×485×1895mm
Overall Dimension	20.3×19.1×74.6inch
Package Dimmension	580×540×1960mm
Package Dimmension	22.8×21.3×77.2inch
Colour	White/Black/Silver

Voltage 220/50/1 Available




**HDSCRCD-4****STANDARD FEATURES**

- Brilliant Internal LED illumination on 2 sides
- Digital temperature controller and display
- Rotational chrome plated shelves
- Round double glass
- Ventilated cooling system
- Automatic defrost

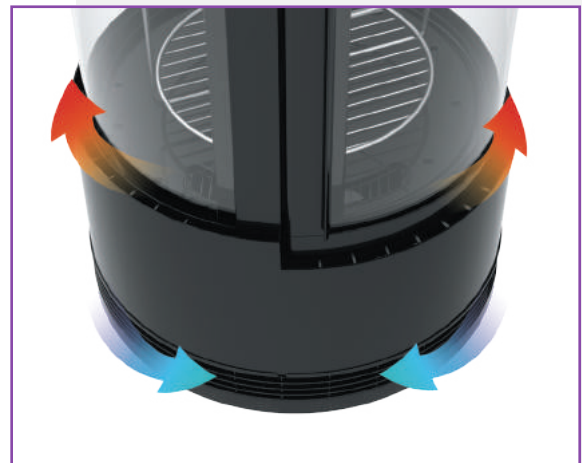

Decrease condensation

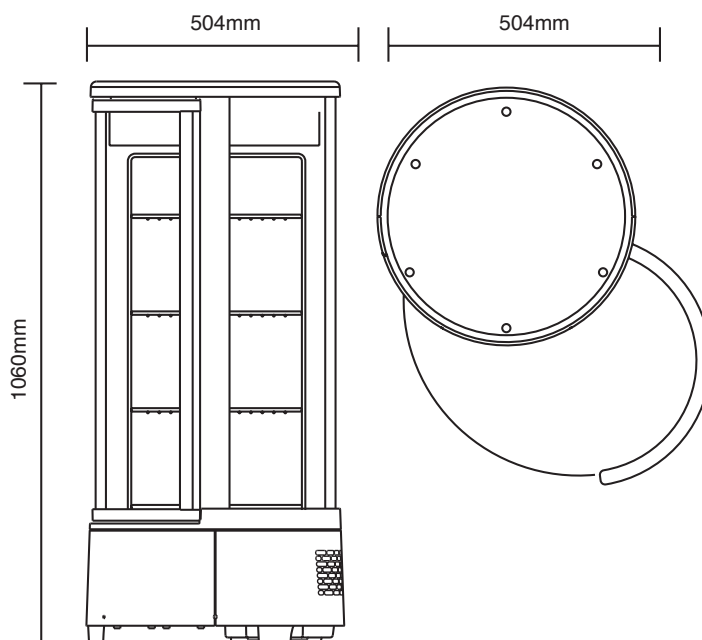

MODEL	HDSCRCD-4
Capacity-Cu.Ft.	2.6Cu.Ft.
Temperature range	2-12°C (35.6-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1
Rated Input Power	170W/1.95A
Horsepower	1/6HP
Refrigerant	R290
N.W.	45kg(99.2lbs)
G.W.	47.5kg(104.7lbs)
Overall Dimension	504×504×1060mm
Overall Dimension	19.8×19.8×41.7inch
Package Dimmension	525×525×1100mm
Package Dimmension	20.7×20.7×43.3inch
Voltage 220/50/1 Available	







HDSRACM-36



HDSRACM-48

STANDARD FEATURES


- Brilliant Internal LED lighting at 2 front sides
- Digital temperature controller and display
- 4 Castors with 2 brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic de frost



- Filter mesh in front of the base
- Adjustable shelves
- White Coated Galvanized Steel Interior with Stainless Steel Exterior
- Condensation water evaporated automatically
- Condensator at back side, free maintenance

OPTIONS

- Sliding doors

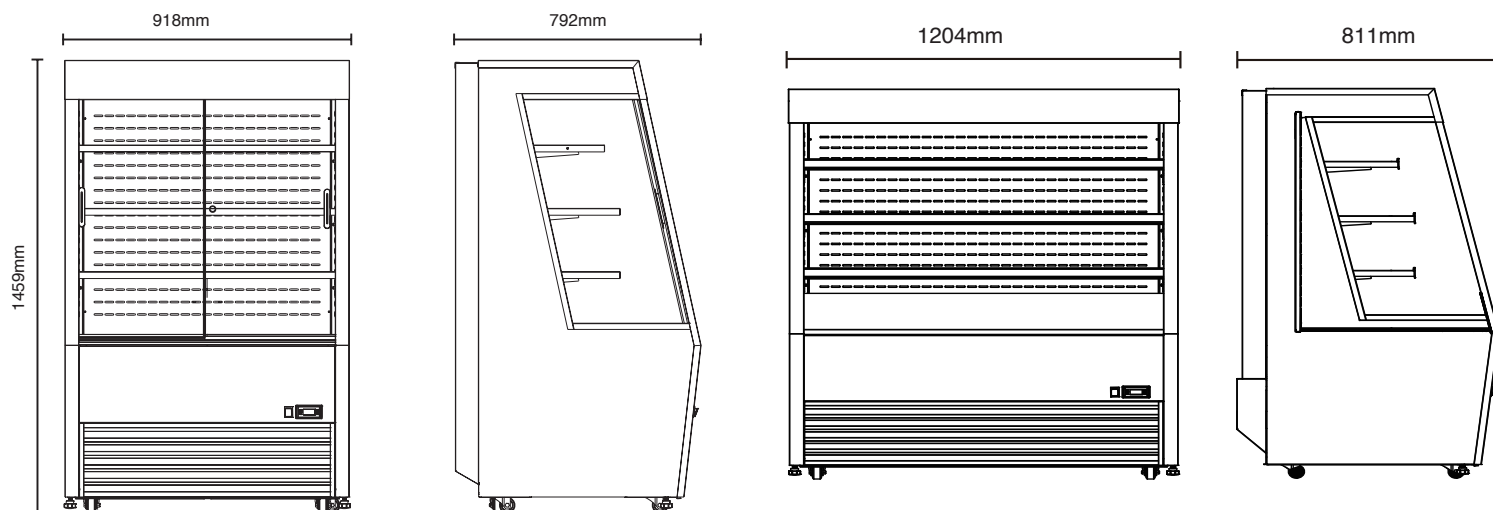


MODEL	HDSRACM-36	HDSRACM-48
Capacity-Cu.Ft.	11.3Cu.Ft.	15.0Cu.Ft.
Temperature range	2-10°C (35.6-50 °F)	2-10°C (35.6-50 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	1500W/14.5A	1200W/13A
Horsepower	3/4HP	3/4HP
Refrigerant	R290	R290
N.W.	130.5kg(287.7lbs)	168kg(370.4lbs)
G.W.	153kg(337.3lbs)	184kg(405.7lbs)
Overall Dimension	918×792×1459mm	1204×811×1459mm
Overall Dimension	36.1×31.2×57.4inch	47.4×31.9×57.4inch
Package Dimmension	990×880×1600mm	1270×880×1610mm
Package Dimmension	39.0×34.6×63.0inch	50.0×34.6×63.4inch
Voltage 220/50/1 Available		



**HDSHSSM-4050****STANDARD FEATURES**

- Built-in LED lighting
- Digital temperature controller and display
- Adjustable Stainless Steel Shelves
- 4 Casters, 2 with brakes
- Stainless Steel Interior and Exterior
- Safety glasses on two sides

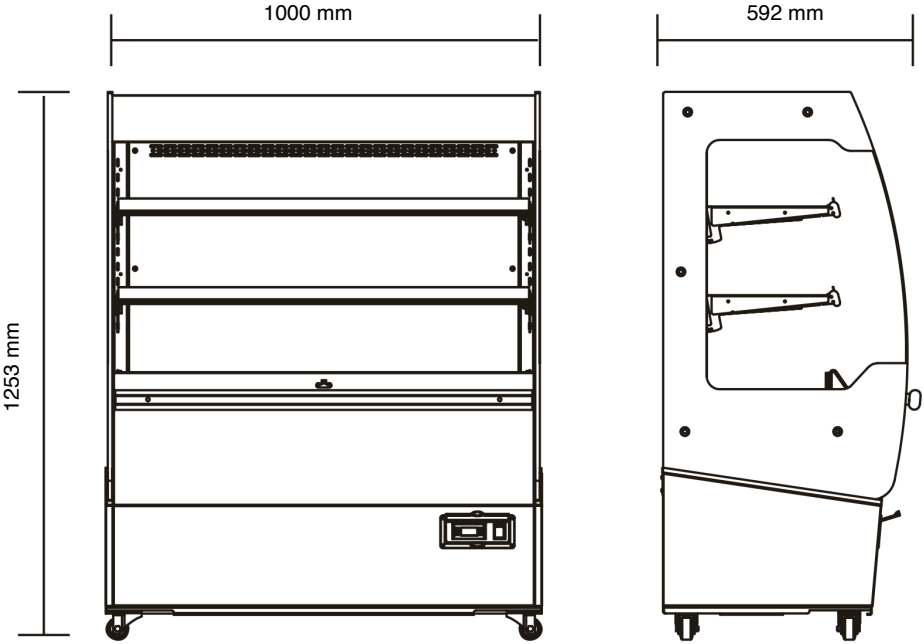


MODEL	HDSHSSM-4050
Capacity-Cu.Ft.	7 Cu.Ft.
Temperature range	30-80°C (86-176 °F)
Rated Input Power	2100W
N.W.	104.5kg(230.4lbs)
G.W.	140kg(187lbs)
Overall Dimension	1000x592x1253mm
Overall Dimension	39.4x23.3x49.3inch
Package Dimmension	1050x680x1400mm
Package Dimmension	41.3x26.8x55.1inch
Voltage 220/50/1 Available	






**HDSCRBC-36****HDSCRBC-48****HDSCRBC-60**

STANDARD FEATURES

- Stainless Steel Interior and Exterior
- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost



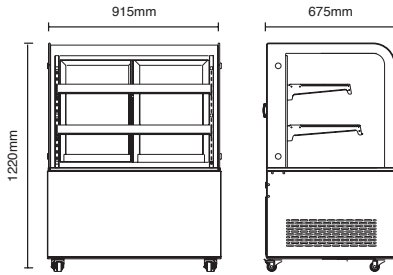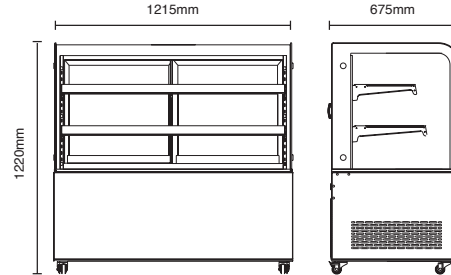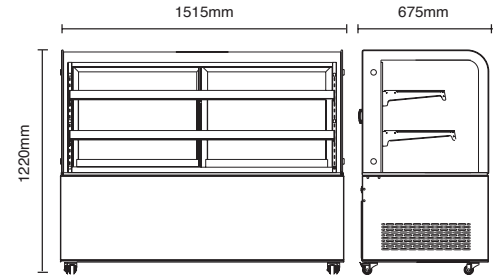
HDSCRBC-36

HDSCRBC-48

HDSCRBC-60

MODEL	HDSCRBC-36	HDSCRBC-48	HDSCRBC-60
Capacity-Cu.Ft.	10.4Cu.Ft.	14.1Cu.Ft.	17.6Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	390W/3.7A	400W/3.7A	420W/4.0A
Horsepower	1/2HP	1/2HP	1/2HP
Refrigerant	R290	R290	R290
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)
Overall Dimension	915×675×1220mm	1215×675×1220mm	1515×675×1220mm
Overall Dimension	36.0×26.6×48.0inch	47.8×26.6×48.0inch	59.6×26.6×48.0inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch
Voltage 220/50/1 Available			





HDSCDBC-36




HDSCDBC-48






HDSCDBC-60

STANDARD FEATURES

- Stainless Steel Interior and Exterior
- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Double tempered glass
- 4 Castors with 2 brakes



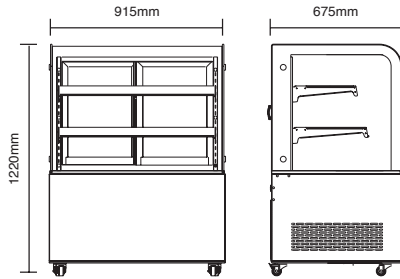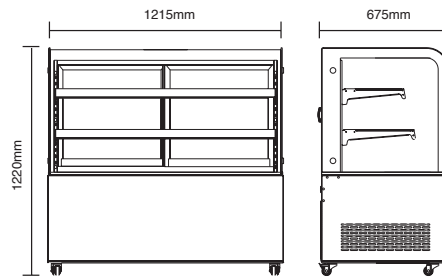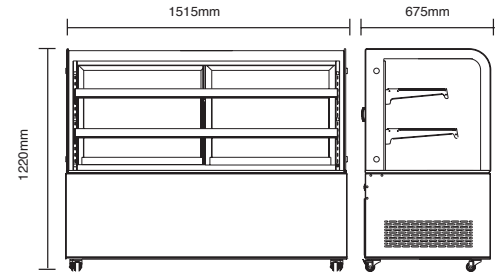
HDSCDBC-36

HDSCDBC-48

HDSCDBC-60

MODEL	HDSCDBC-36	HDSCDBC-48	HDSCDBC-60
Capacity-Cu.Ft.	10.4Cu.Ft.	14.1Cu.Ft.	17.6Cu.Ft.
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	0.2A	0.3A	0.3A
N.W.	105kg(231.5lbs)	130kg(286.6lbs)	158kg(348.3lbs)
G.W.	124kg(273.4lbs)	163kg(359.4lbs)	211kg(465.2lbs)
Overall Dimension	915×675×1220mm	1215×675×1220mm	1515×675×1220mm
Overall Dimension	36.0×26.6×48.0inch	47.8×26.6×48.0inch	59.6×26.6×48.0inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch

Voltage 220/50/1 Available



Designed In USA.

PERFORMANCE. DURABILITY. VALUE.



HDSSRBC-36




HDSSRBC-48






HDSSRBC-60

STANDARD FEATURES

- Stainless Steel Interior and Exterior
- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Digital temperature control and display
- Double tempered glass
- 4 Castors with 2 brakes
- Ventilated cooling system
- Automatic Defrost



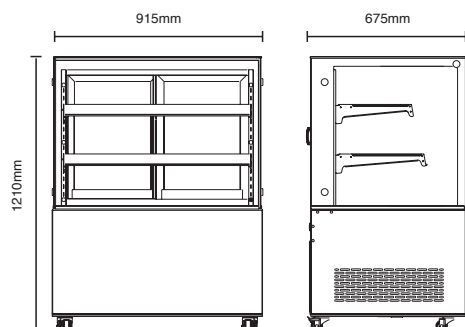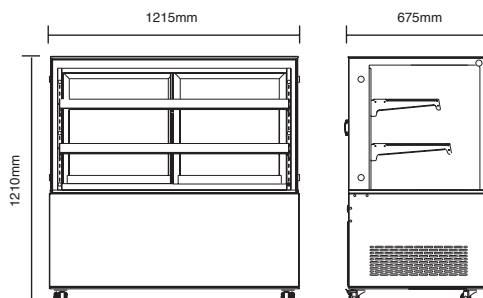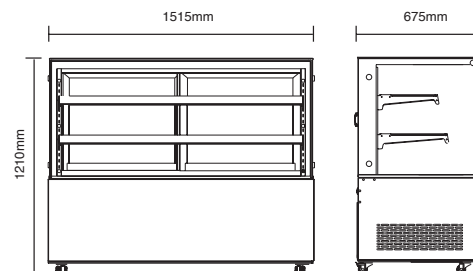
HDSSRBC-36

HDSSRBC-48

HDSSRBC-60

MODEL	HDSSRBC-36	HDSSRBC-48	HDSSRBC-60
Capacity-Cu.Ft.	10.4Cu.Ft.	14.1Cu.Ft.	18.0Cu.Ft.
Temperature range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	390W/3.7A	400W/3.7A	420W/4.0A
Horsepower	1/2HP	1/2HP	1/2HP
Refrigerant	R290	R290	R290
N.W.	135kg(297.6lbs)	155kg(341.7lbs)	182kg(401.2lbs)
G.W.	154kg(339.5lbs)	188kg(414.5lbs)	235kg(518lbs)
Overall Dimension	915×675×1210mm	1215×675×1210mm	1515×675×1210mm
Overall Dimension	36.0×26.6×47.6inch	47.8×26.6×47.6inch	59.6×26.6×47.6inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch
Voltage 220/50/1 Available			





HDSSDBC-36



HDSSDBC-48






HDSSDBC-60

STANDARD FEATURES

- Stainless Steel Interior and Exterior
- Brilliant Internal LED lighting each shelf and bottom
- 2 adjustable glass shelves
- Double tempered glass
- 4 Castors with 2 brakes

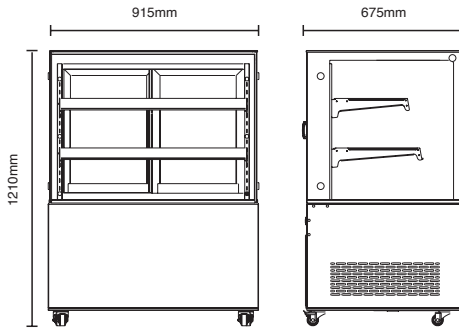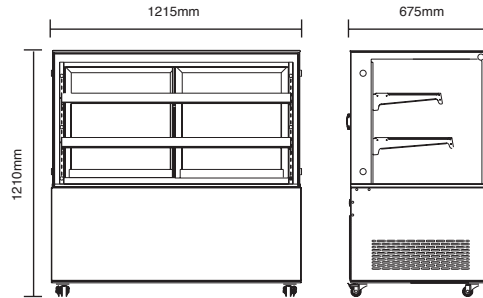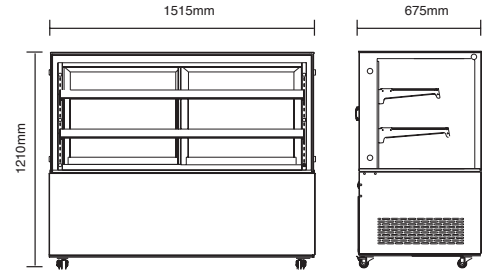


HDSSDBC-36

HDSSDBC-48

HDSSDBC-60

MODEL	HDSSDBC-36	HDSSDBC-48	HDSSDBC-60
Capacity-Cu.Ft.	10.4Cu.Ft.	14.1Cu.Ft.	18.0Cu.Ft.
Voltage/Hertz/Phase	110-120V~/60Hz/1	110-120V~/60Hz/1	110-120V~/60Hz/1
Rated Input Power	0.2A	0.3A	0.3A
N.W.	106.5kg(234.8lbs)	133kg(293.2lbs)	160.5kg(353.8lbs)
G.W.	125.5kg(276.7lbs)	166kg(366.0lbs)	213.5kg(470.1lbs)
Overall Dimension	915×675×1210mm	1215×675×1210mm	1515×675×1210mm
Overall Dimension	36.0×26.6×47.6inch	47.8×26.6×47.6inch	59.6×26.6×47.6inch
Package Dimmension	1025×765×1280mm	1325×765×1280mm	1600×743×1270mm
Package Dimmension	40.4×30.1×50.4inch	52.2×30.1×50.4inch	63.0×29.3×50.0inch

Voltage 220/50/1 Available



Designed In USA.

PERFORMANCE. DURABILITY. VALUE.



PERFORMANCE. DURABILITY. VALUE.

sales@heavydutysystems.com

www.heavydutysystems.com