



HDSGFSHE-35




HDSGFSHE-25S

Photos are Shown
with Optional Casters


STANDARD FEATURES

- High efficiency burners
- Short recovery time
- Robertshaw control system to guarantee best performance
- Stainless steel front and sides
- Tube design, easy to clean
- 1 1/4" full port drain valve
- Thermostat adjusts from 200 - 400°F (93 - 204°C)
- 450°F (232°C) hi-limiter guarantees safety
- 4" height adjustable stainless steel legs
- Manual gas shut off valve
- Drain extension
- Optional with Casters


- Gas Products available in either Natural or LP Gas setup
- Thermostats (if applicable) available in either Fahrenheit or Celsius

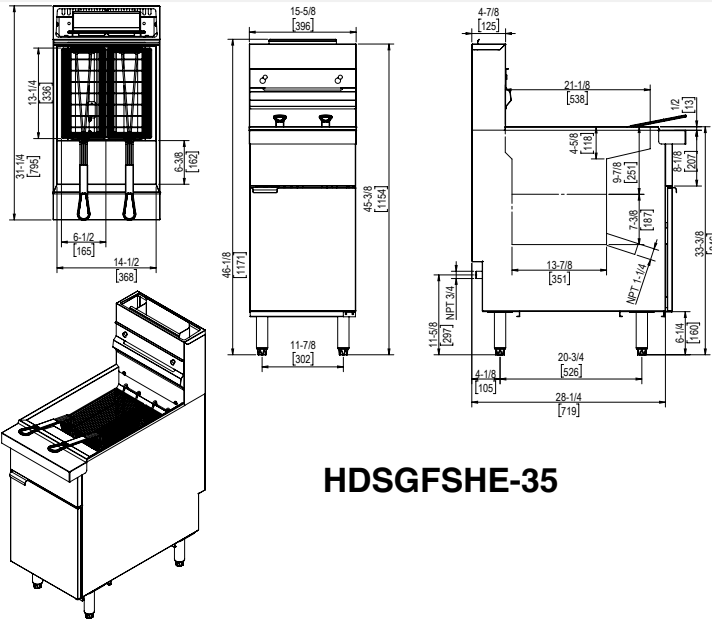


HDSGFSHE-35

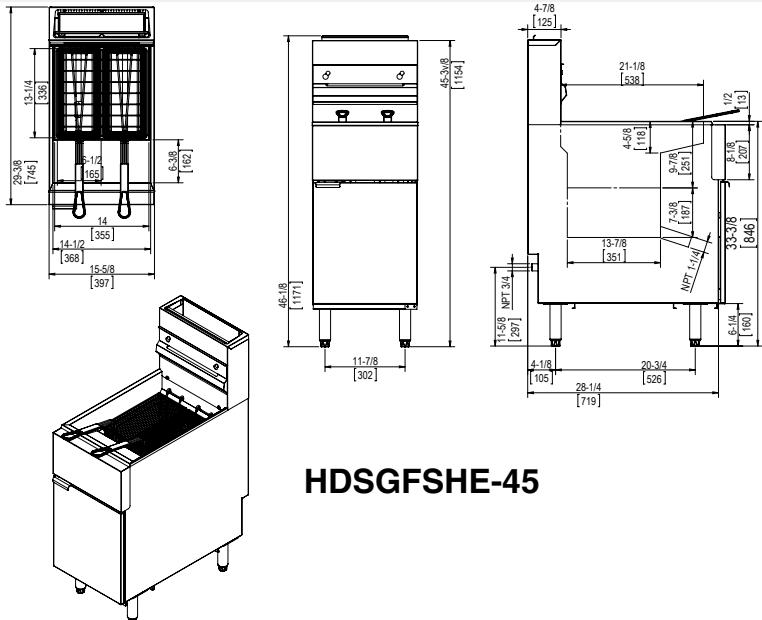

HDSGFSHE-45

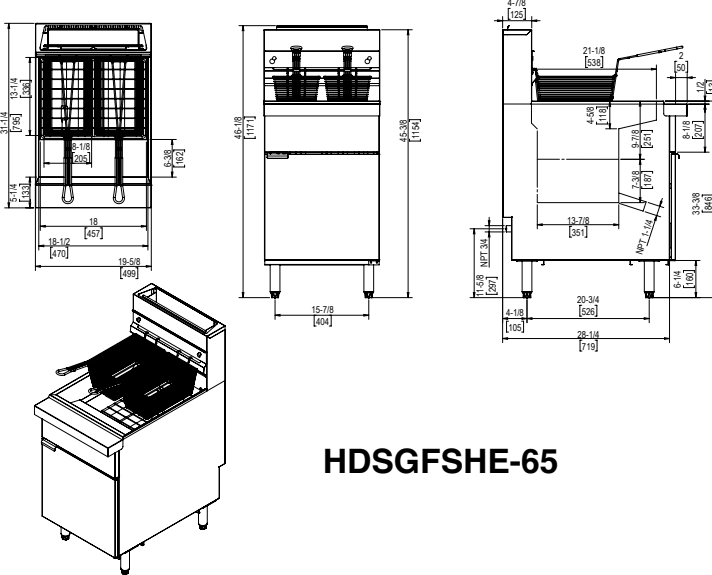

HDSGFSHE-65

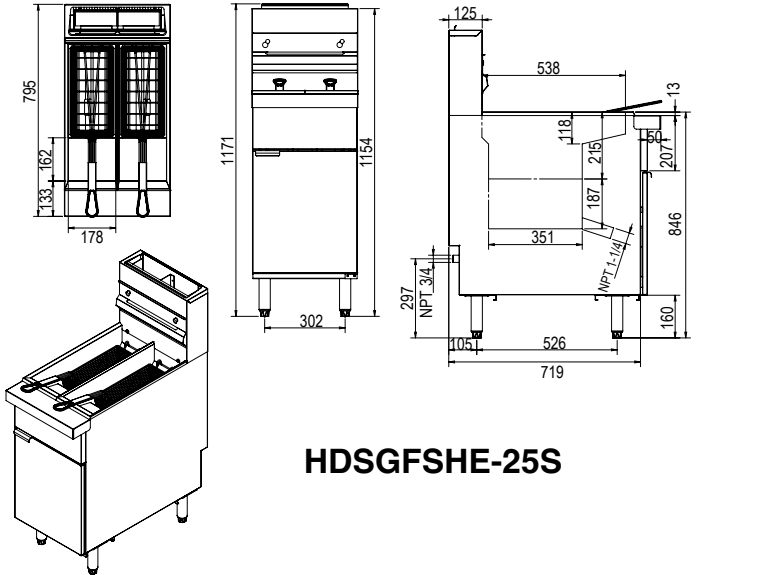

HDSGFSHE-25S

MODEL	TANK CAPACITY	TANK OPEN SIZE	TOTAL INPUT (btu/hr)	PRODUCT (WxDxH)	NW	GW
HDSGFSHE-35	35 lbs	14" x13 1/4"	69,000	396 x 795 x 1171 mm 15.6 x 31.3 x 46.1 inch	143 lbs	159 lbs
HDSGFSHE-45	45 lbs	14" x13 1/4"	92,000	396 x 795 x 1171 mm 15.6 x 31.3 x 46.1 inch	153 lbs	173 lbs
HDSGFSHE-65	65 lbs	18" x13 1/4"	115,000	499 x 795 x 1171 mm 19.6 x 31.3 x 46.1 inch	173 lbs	193 lbs
HDSGFSHE-25S	25 lbs + 25 lbs	6.6" x13 1/4"	92,000	396 x 795 x 1171 mm 15.6 x 31.3 x 46.1 inch	163 lbs	183 lbs

sales@heavydutysystems.com