



HDSFVMR-29-1-LE




HDSFVMR-54-2-LE




HDSFVMR-79-3-LE

STANDARD FEATURES


- Exterior: Coated steel. Black or white finish available.
- Anti-Fogging Low E Glass.
- Interior: Attractive aluminum liner with stainless steel floor.
- Refrigeration system maintains temperatures between 33°F and 41°F(0.5°C to 5°C).
- Self-Closing double pane glass door with positive seal.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- 4” casters.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDROCARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant

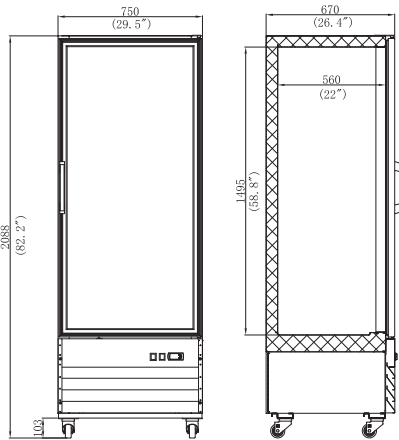

HDSFVMR-29-1-LE

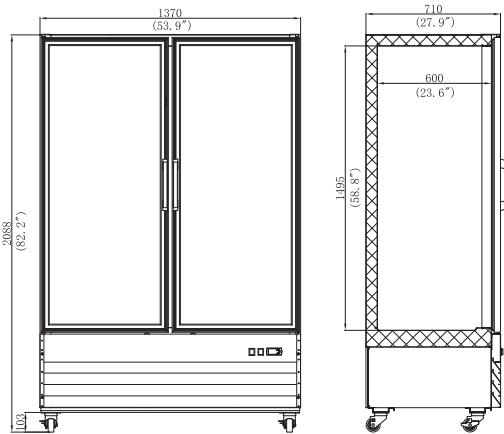

HDSFVMR-54-2-LE

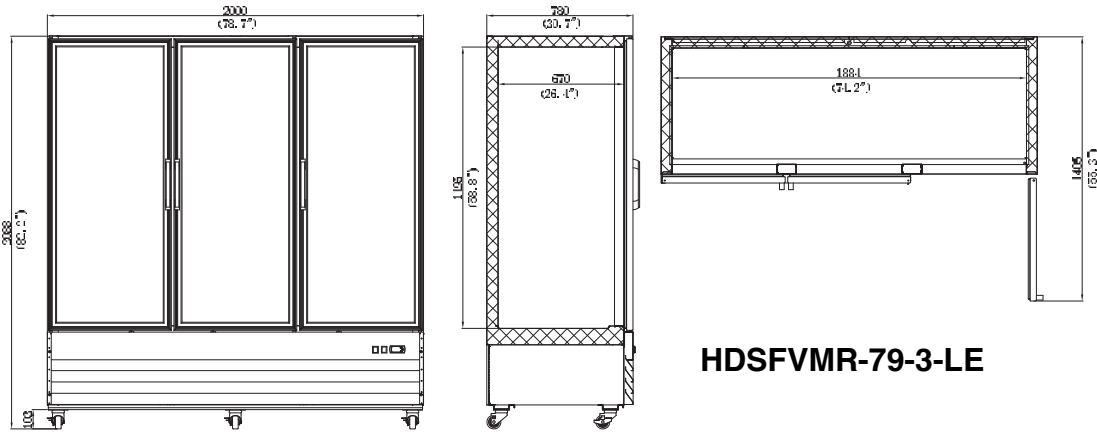

HDSFVMR-79-3-LE

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSFVMR-29-1-LE	1	4	29.5 x 26.4 x 82.2 in 750 x 670 x 2088 mm	16.3 cu.ft. 462 litres	1/4	3.4	115/60/1	NEMA 5-15P
HDSFVMR-54-2-LE	2	8	53.9 x 27.9 x 82.2 in 1370 x 710 x 2088 mm	35.5 cu.ft. 1006 litres	1/3	4.5	115/60/1	NEMA 5-15P
HDSFVMR-79-3-LE	3	12	78.7 x 30.7 x 82.2 in 2000 x 780 x 2088 mm	66.5 cu.ft. 1885 litres	3/7	6.9	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.