




HDSMRPT-48-2-LE

STANDARD FEATURES

- Exterior: Coated steel. Black or white finish available.
- Anti-Fogging Low E Glass.
- Interior: Attractive aluminum liner with stainless steel floor.
- • Refrigeration system maintains temperatures between 33°F and 41°F (0.5°C to 5°C).
- (2) front self-closing hinged double pane glass doors, (2) back self-closing sliding double pane glass doors.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Leveling feet or casters are available.
- LED lighting.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDROCARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant

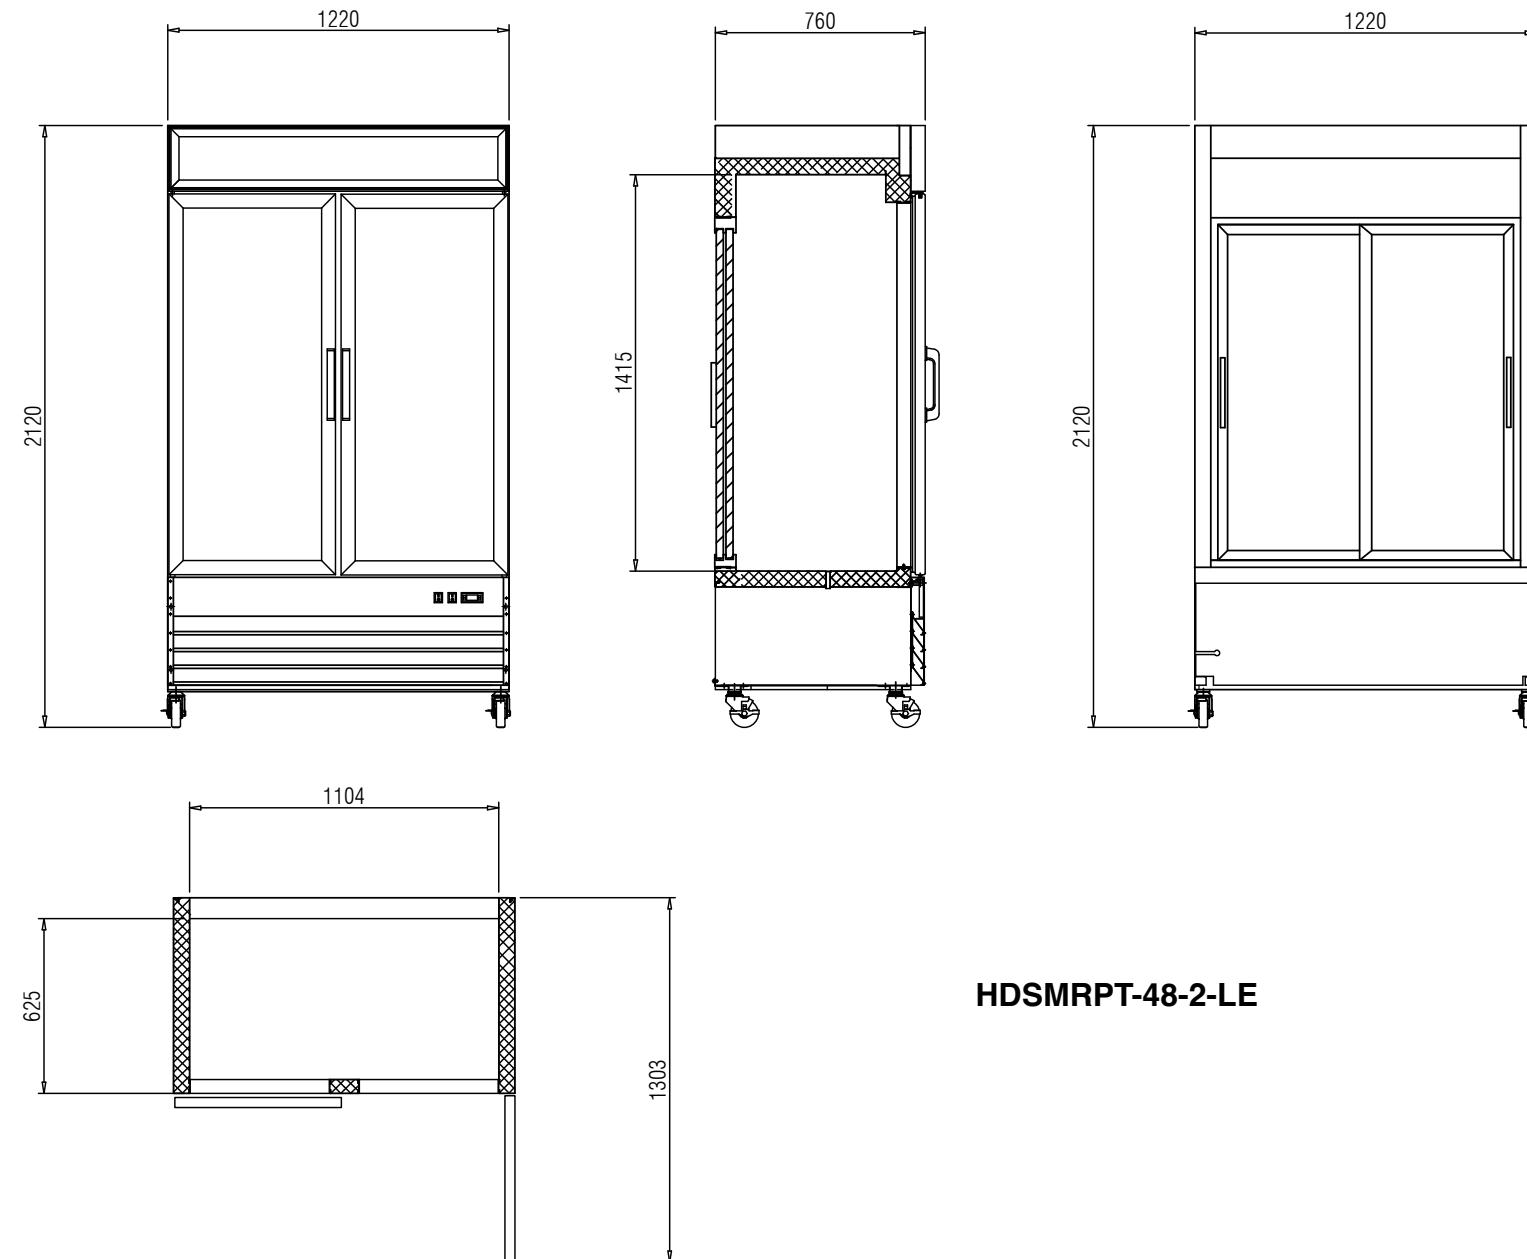

HDSMRPT-48-2-LE

MODEL	DOORS	SHELVES	DIMENSIONS	CAPACITY	HP	VOLTAGE	PLUG TYPE
HDSMRPT-48-2-LE	4	8	48 x 30 x 81 in 1220 x 760 x 2060 mm	30.0 cu.ft. 845 liters	1	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.