

HDSBC-10



HDSBC-22




HDSBC-44

STANDARD FEATURES


- HDSBC-10
- Stainless steel structure
- Good insulation to improve holding efficiency
- 110ºC (230ºF) EGO thermostat controlled, durable and robust
- Temperature display on top to read holding temperature
- Water-proof on/off switch
- Double durable stainless steel round heating element
- Forced air circulation with special baffle plate
- Stainless steel lock
- Four swivel heavy duty 6” castors with brake
- Bumpers all around to provide better protection while transportation
- Recessed hand-grasping handle on both sides Rubber seal on the doors
- Bottom water tray to keep food humidity when needed
- GN2/1 wire grid
- Available in 3 different sizes

- **Thermostats (if applicable) available in either Fahrenheit or Celsius**
- **Available in various electrical power setups (power setups available for all areas of the world)**
- **Power may vary based on specified electrical setup**


ELECTRIC COOKING Banquet Cart

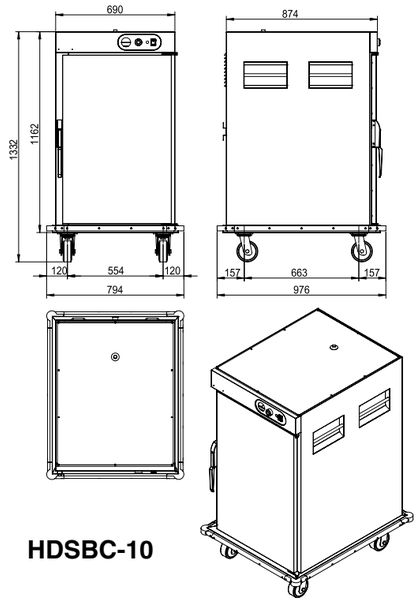


HDSBC-10

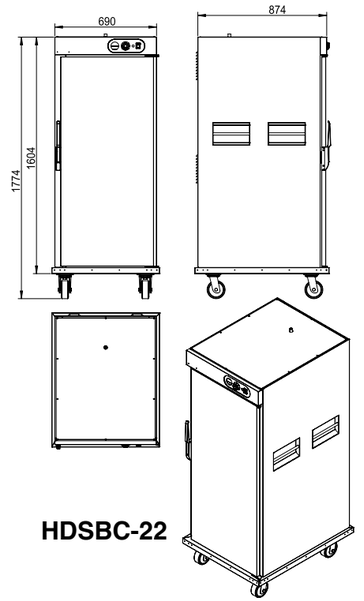

HDSBC-22



HDSBC-44

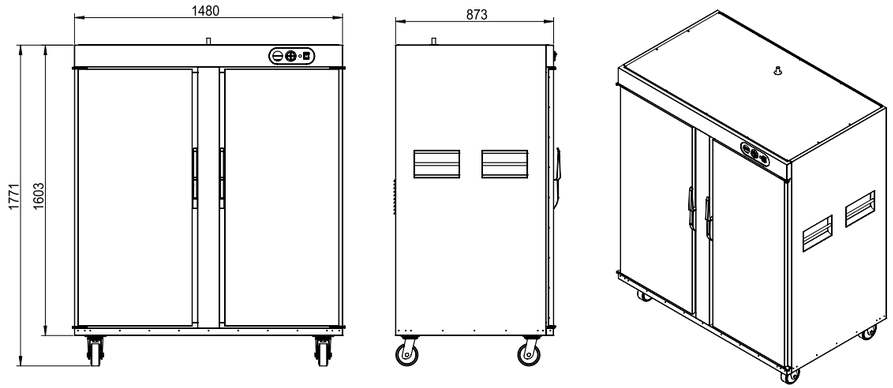

MODEL	CAPACITY	POWER	TEMPERATURE	PRODUCT (WxDxH)	NW
HDSBC-10	10 x GN 1/1	2570 W	30 - 110ºC 86 - 230ºF	780 x 960 x 1355 mm 31 x 38 x 53 inch	145 kg 319 lbs
HDSBC-22	22 x GN 1/1	2570 W	30 - 110ºC 86 - 230ºF	780 x 960 x 1755 mm v31 x 38 x 69 inch	182 kg 400 lbs
HDSBC-44	44 x GN 1/1	2570 W	30 - 110ºC 86 - 230ºF	1540 x 960 x 1755 mm 61 x 38 x 69 inch	318 kg 700 lbs

sales@heavydutysystems.com

All electric cooking equipment is supplied with a cord and plug.

Designed In USA.

PERFORMANCE. DURABILITY. VALUE.