

HDSPP-1-50-6



HDSPP-2-71-9



HDSPP-3-92-12

STANDARD FEATURES


- Stainless steel exterior, stainless steel interior, aluminum back.
- Refrigeration system keeps food at safe temperatures between 33ºF and 41ºF (0.5ºC to 5ºC).
- Self-Closing doors with 90 degree stay-open feature.
- Shelves: Adjustable heavy-duty PVC coated shelves.
- Preinstalled 4” heavy-duty casters with brakes.
- Option of different handles available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- Cutting board thickness :

  20MM – Exterior/Interior SS304 or Exterior SS430/Interior SS304


  15MM- Exterior SS430/Interior painted aluminum
- Polycarbonate pans (per pan layout) included standard
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.

REFRIGERATION Pizza Prep Table


HDSPP-1-50-6

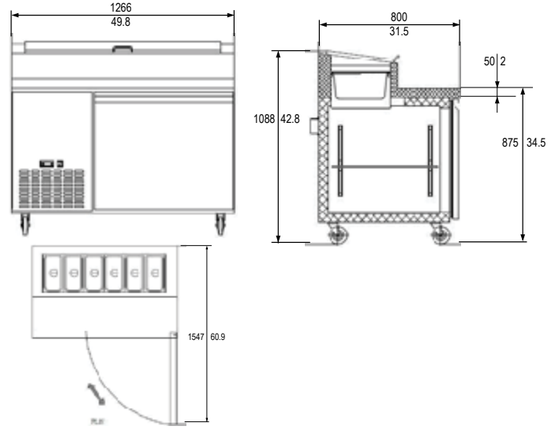

HDSPP-2-71-9

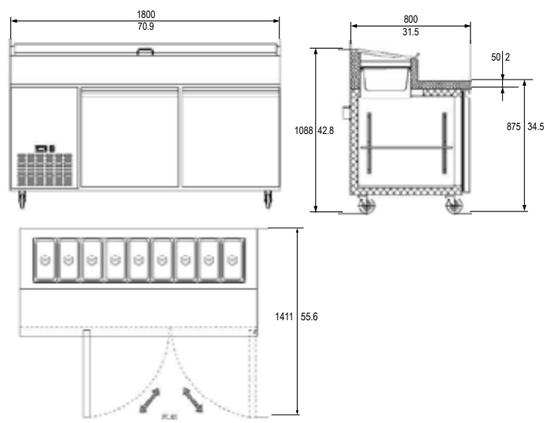

HDSPP-3-92-12

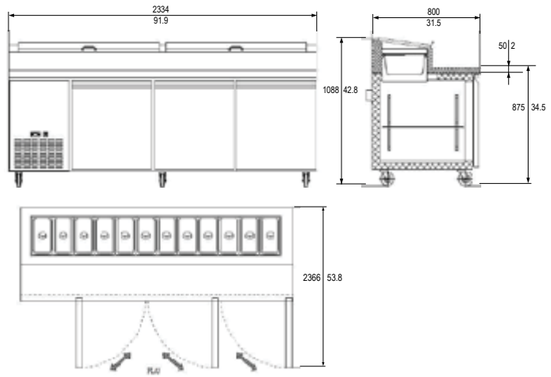

MODEL	DOORS	SHELVES	PAN LAYOUT	DIMENSIONS	CAPACITY	HP	AMPS	VOLTAGE	PLUG TYPE
HDSPP-1-50-6	1	1	6x1/3	49 7/8 x 31 1/2 x 42 7/8 in 1266 x 800 x 1088 mm	13.8 cu.ft. 391 liters	1/6	2.64	115/60/1	NEMA 5-15P
HDSPP-2-71-9	2	2	9X1/3	70 9/10 x 31 1/2 x 42 7/8 in 1800 x 800 x 1088 mm	16.9 cu.ft. 477 liters	1/5	3.42	115/60/1	NEMA 5-15P
HDSPP-3-92-12	3	3	12X1/3	91 9/10 x 31 1/2 x 42 in 2334 x 800 x 1088 mm	24.2 cu.ft. 684 liters	1/4+	5.28	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.

Designed In USA. PERFORMANCE. DURABILITY. VALUE.